




REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	

101.6±0.2

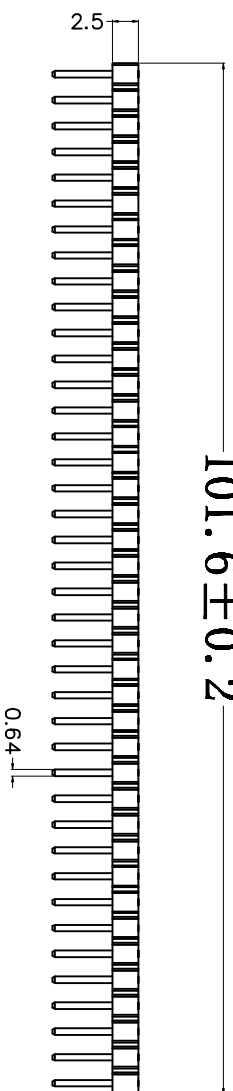

- NOTES:
- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
 - ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE: -40°C~+105°C.

GENERAL TOLERANCE	ANGLE TOLERANCE
X, ±0.60	X, ±5°
.X, ±0.38	.X, ±3°
.XX, ±0.25	.XX, ±2°

PROJECTION UNITS	TITLE
mm	2.54MM PIN HEADER
SHEET SIZE	SERIES
A4	LL1009-1B

ITEM	PART NAME	PART NO.	MATERIALS	FINISHED
1	HOUSING		COPPER ALLOY	GOLD OR TIN PLATED
2	CONTACT		THERMOPLASTIC	UL 94 V-0

DRAWING TYPE	CUSTOMER	SCALE	DRAWING NO.
SCALE	1:1	SCALE	DRAWING NO.


慈溪蓝翎电子有限公司
 CIXI LANLING ELECTRONICS CO., LTD.