
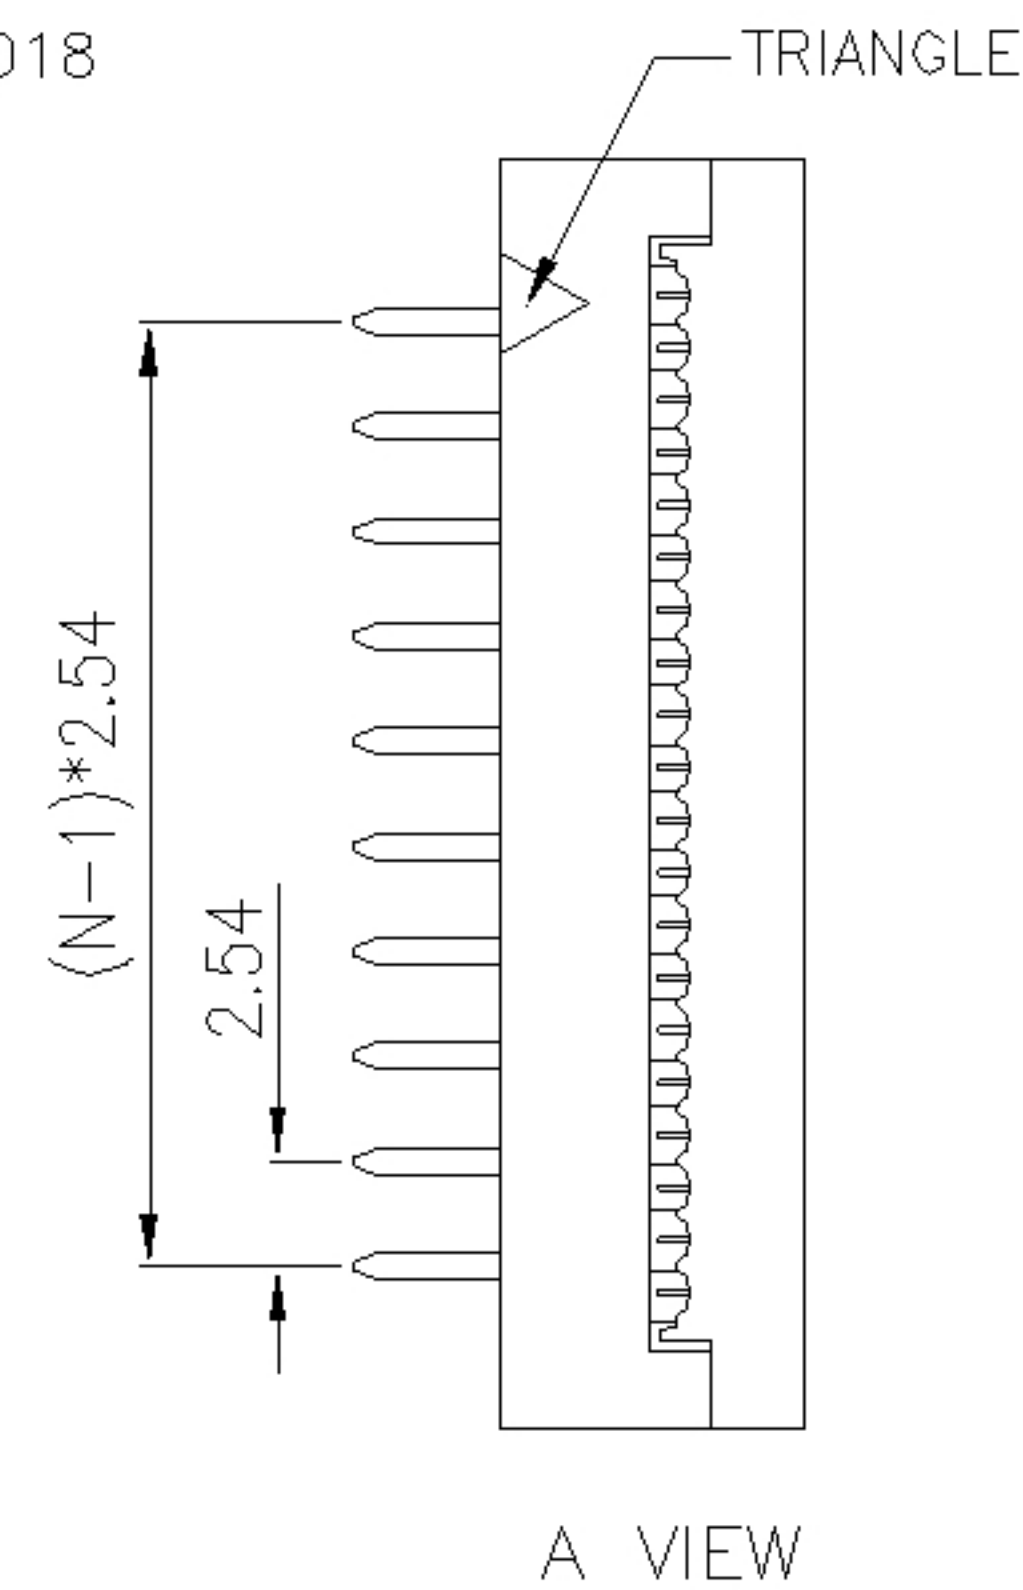


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	CJJ 11/18/2014	~	CJJ 11/18/2014
B		CJJ 11/18/2014	~	

N:NUMBER OF CONTACTS/2

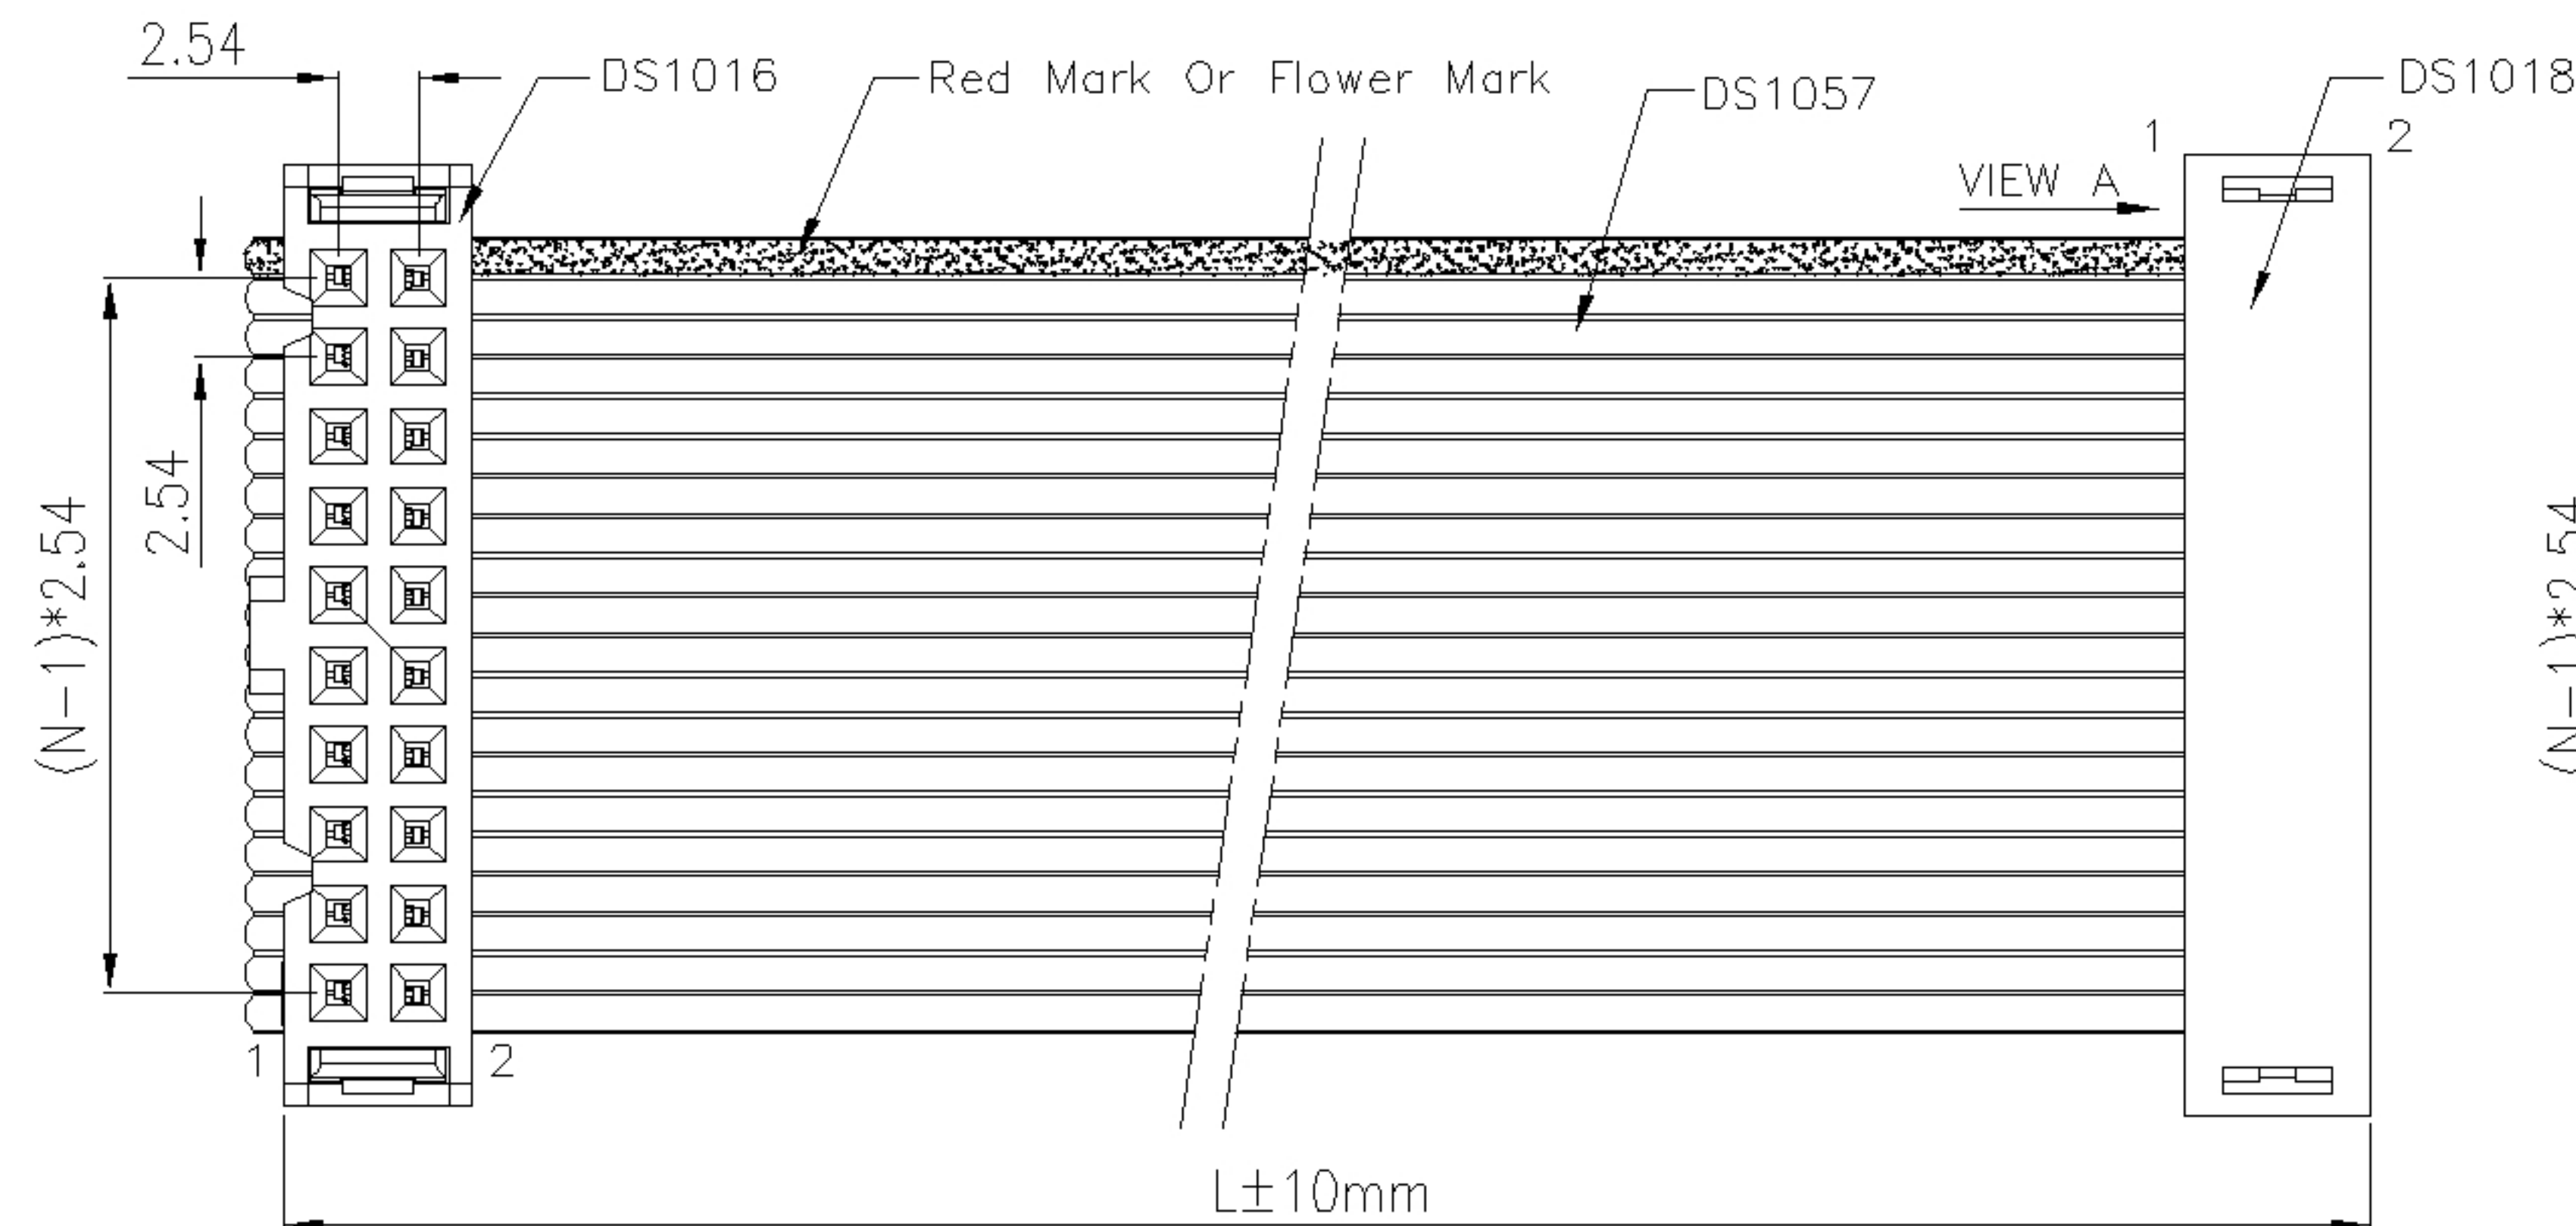

1. PRODUCT NUMBER CODE:

- LL1050-2A-XX 1 B X X A X X X
- CABLE STYLE
 - 1: TYPE 1
 - LENGTH DIM L

0114:114mm	0120:120mm
0290:290mm	3400:3400mm
1500:1500mm	0170:170mm
2400:2400mm	0280:280mm
0085:85mm	0192:192mm
4300:4300mm	
 - WIRE DIAMETER
 - 1:φ0.100 FOLWER MARK
 - 2:φ0.127 RED MARK
 - 3:φ0.100 RED MARK
 - 4:φ0.127 FOLWER MARK
 - FLAT CABLE COLOR
 - A:GRAY
 - STRAIN RELIEF
 - M:W/
 - N:W/O
 - CONTACT PLATING
 - 2:GOLD+NICKEL
 - 0: { DS1016 GOLD+NICKEL
DS1018 SELECTIVE GOLD FLASH
 - 8: { DS1016 GOLD+NICKEL
DS1018 FULL GOLD FLASH
 - Si: { DS1016 SELECTIVE GOLD FLASH
DS1018 SELECTIVE GOLD FLASH
 - HOUSING COLOR
 - B:BLACK
 - CONNECTOR Q'TY
 - 1: 2 CONNECTOR
(1PCS DS1016 ;1PCS DS1018)
 - NO.OF CONTACTS

10:10P	20:20P	30:30P	50:50P
14:14P	24:24P	34:34P	60:60P
16:16P	26:26P	40:40P	64:64P

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	FLAT CABLE WITH CONNECTORS	
X.	±15	X.	±3°	UNITS	mm			
.X	±10	.X	±2°	SHEET SIZE	A4	SERIES	LL1050-2A	
.XX	±5	.XX	±1°					
DRAWING TYPE		CUSTOMER			慈溪蓝翎电子有限公司 CIXI LANLING ELECTRONICS CO., LTD. Tel: 86-574-63519036 Fax: 86-574-63517070			
SCALE		1:1	SHEET	1 OF 1				
DRAWING NO.								