



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJU 11/18/2014	~	

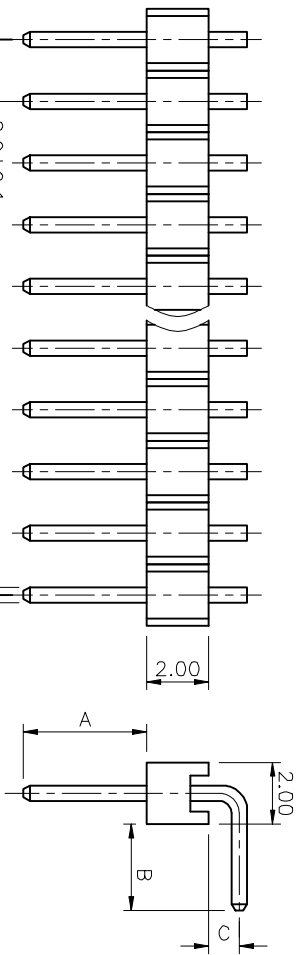


- NOTES:
- MATERIAL & FINISHES:
 - INSULATOR: THERMOPLASTIC(UL 94V-0).
 - CONTACT MATERIAL: COPPER ALLOY.
 - SPECIFICATION
 - CURRENT RATING: 1.5 Amp.
 - INSULATION RESISTANCE: 1000MΩ Min.
 - DIELECTRIC WITHSTANDING: 600VAC.
 - CONTACT RESISTANCE: 20mΩmax.
 - OPERATING TEMPERATURE: -40°C TO +105°C.

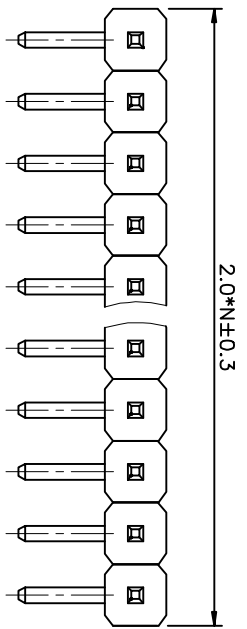

N: NUMBER OF CONTACTS
A&B&C: CUSTOMER LENGTH AVAILABLE

TABLE A:

TYPE	Dimension			Pin Length
	A	B	C	
1	4.00	2.80	1.00	10.50
2	5.00	2.50	1.00	11.00
3	5.00	4.75	0.75	13.10
4	3.80	3.80	0.75	11.00
5	2.50	2.80	1.30	9.20
6	3.70	3.00	1.75	11.00
7	3.50	2.50	0.25	9.00



RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	mm	mm	2.0mm PIN HEADER	
.X	±0.38	.X	±3°	A4	A4	SINGLE ROW RIGHT ANGLE TYPE	
.XX	±0.25	.XX	±2°				
DRAWING TYPE CUSTOMER		DRAWING TYPE CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.							

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.