

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	





**SPECIFICATIONS**

**Current Rating:** Lamps  
**Insulator resistance:** 1000 Megohms min.  
**Dielectric Withstanding:** AC 500V  
**Operating Temperature:** -40 °C0 +105°C  
**Insulator Material:** NF-0T  
**Contact Material:** Brass  
**Plating:** Gold flash

**UNSPECIFIED TOLERANCE : ± 0.20**

**Dimen Sions List**

Contacts Per Row	A	B	Contacts Per Row	A	B
2*02	2.54	1.27	2*22	27.94	26.67
2*03	3.81	2.54	2*23	29.21	27.94
2*04	5.08	3.81	2*24	30.48	29.21
2*05	6.35	5.08	2*25	31.75	30.48
2*06	7.62	6.35	2*26	33.02	31.75
2*07	8.89	7.62	2*27	34.29	33.02
2*08	10.16	8.89	2*28	35.56	34.29
2*09	11.43	10.16	2*29	36.83	35.56
2*10	12.70	11.43	2*30	38.10	36.83
2*11	13.97	12.70	2*31	39.37	38.10
2*12	15.24	13.97	2*32	40.64	39.37
2*13	16.51	15.24	2*33	41.91	40.64
2*14	17.78	16.51	2*34	43.18	41.91
2*15	19.05	17.78	2*35	44.45	43.18
2*16	20.32	19.05	2*36	45.72	44.45
2*17	21.59	20.32	2*37	46.99	45.72
2*18	22.86	21.59	2*38	48.26	46.99
2*19	24.13	22.86	2*39	49.53	48.26
2*20	25.40	24.13	2*40	50.80	49.53
2*21	26.67	25.40			

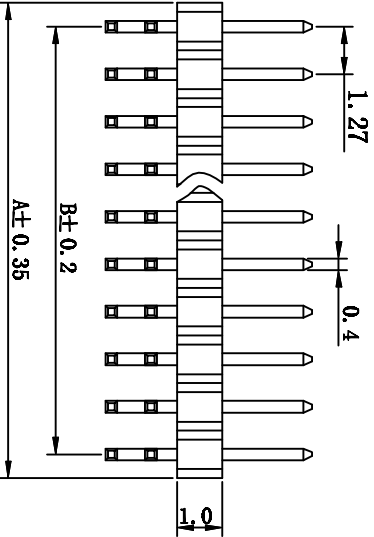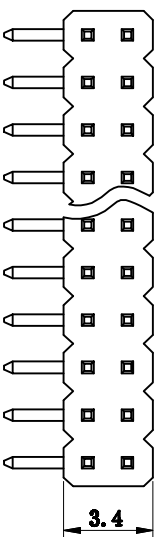

2	CONTACT	COPPER ALLOY	GOLD OR TIN PLATED
1	HOUSING	THERMOPLASTIC	UL 94 V-0
ITEM	PART NAME	PART NO.	MATERIALS
1		2	FINISHED

GENERAL TOLERANCE		ANGLE TOLERANCE	
X, .XX	±0.60 ±0.38 ±0.25	X, .XX	±5° ±3° ±2°
DRAWING TYPE	CUSTOMER	SHEET	1 OF 1
SCALE	1:1	DRAWING NO.	

PROJECTION UNITS: mm

SHEET SIZE: A4

TITLE: 1.27MM 2\*40Pin Header 90°

SERIES: LL1013-01D

**慈溪蓝翎电子有限公司**  
 CIXI LANLING ELECTRONICS CO., LTD.