
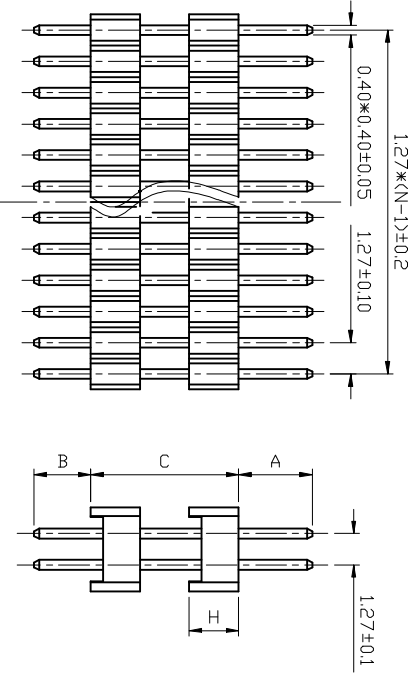


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N QDR	CJJ 11/18/2014	~	


NOTES:

- MATERIAL
 - INSULATOR:THERMOPLASTIC(UL 94V-0).
 - CONTACT MATERIAL: COPPER ALLOY.
- SPECIFICATION
 - CURRENT RATING:1.0 Amp.
 - INSULATION RESISTANCE:1000MΩ Min.
 - DIELECTRIC WITHSTANDING:300VAC.
 - CONTACT RESISTANCE:50mΩ Max.
 - OPERATING TEMPERATURE:-40°C TO+105°C.

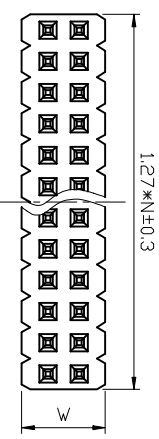

TYPE	DIM A	DIM B	DIM C
1	3.00	2.30	6.00
2	4.00	3.00	15.00
3			
4			
5			
6			
7			
8			
9			
10			
11			

N: HALF OF CONTACTS



RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	
X	±0.60	X	±5°	mm	
.X	±0.38	.X	±3°	A4	
.XX	±0.25	.XX	±2°		
DRAWING TYPE	CUSTOMER	SCALE	1:1	SHEET	1 OF 1
DRAWING NO.					

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.

TITLE: DUAL ROW PIN HEADER PITCH 1.27mm

SHEET SIZE: A4

SERIES: LL1013-03A

