

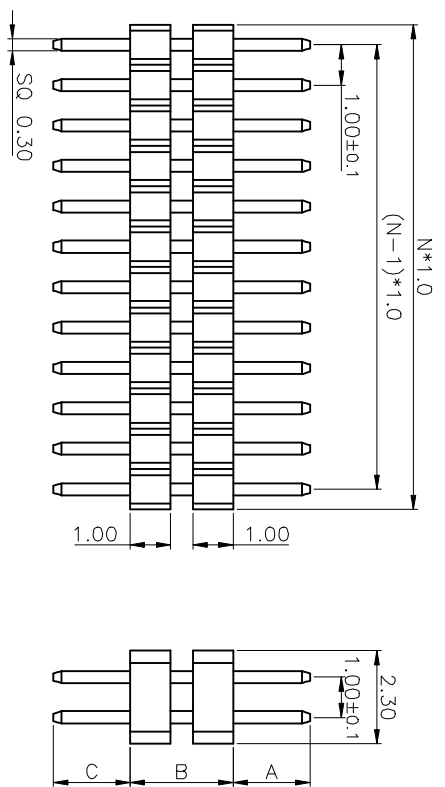


REV	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	

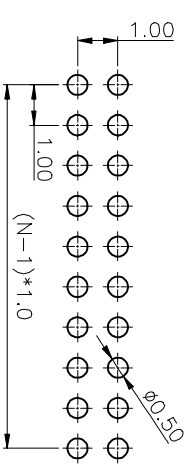

- NOTES:
- MATERIAL
    - INSULATOR:THERMOPLASTIC(UL 94V-0).
    - CONTACT MATERIAL:COPPER ALLOY.
  - SPECIFICATION
    - CURRENT RATING:1.0 Amp.
    - INSULATION RESISTANCE:500MΩ Min.
    - DIELECTRIC WITHSTANDING:600VAC.
    - CONTACT RESISTANCE:20mΩ Max.
    - OPERATING TEMPERATURE:-40°C TO+105°C.

TYPE	DIM A	DIM B	DIM C
1	1.90	2.55	1.90
2			
3			
4			
5			
6			
7			
8			
9			
10			

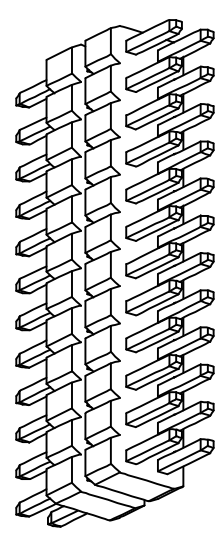

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X: ±0.60	X: ±0.38	X: ±5°	X: ±3°	UNIT: mm	SHEET SIZE: A4	DUAL ROW PIN HEADER	
.XX ±0.25	.XX	.XX ±2°	.XX	SHEET SIZE: A4	SERIES: LL1013-04F	PITCH 1.0mm STACK V/T TYPE	
DRAWING TYPE: CUSTOMER	SCALE: 1:1	DRAWING NO.:		DRAWING NO.:			

慈溪蓝翎电子有限公司  
CIXI LANLING ELECTRONICS CO., LTD.

