



REV	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	




NOTES:

1. MATERIAL
 - 1.1 INSULATOR:THERMOPLASTIC(UL 94V-0).
 - 1.2 CONTACT MATERIAL:COPPER ALLOY.
2. SPECIFICATION
 - 2.1 CURRENT RATING:1.0 Amp.
 - 2.2 INSULATION RESISTANCE:500MΩ Min.
 - 2.3 DIELECTRIC WITHSTANDING:600VAC.
 - 2.4 CONTACT RESISTANCE:20mΩ Max.
 - 2.5 OPERATING TEMPERATURE:-40°C TO+105°C.

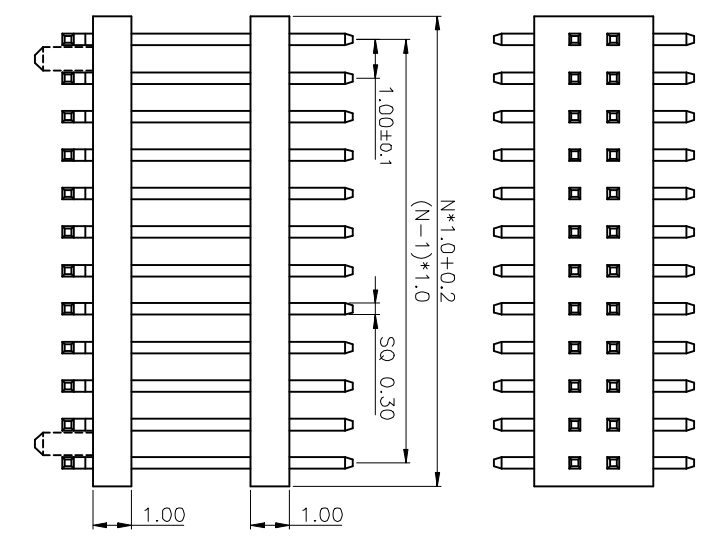

TYPE	DIM A	DIM B	DIM C	DIM D
1	1.65	5.10	5.20	0.80
2	1.65	6.73	5.20	0.80
3	1.65	9.00	5.20	0.80
4				
5				
6				

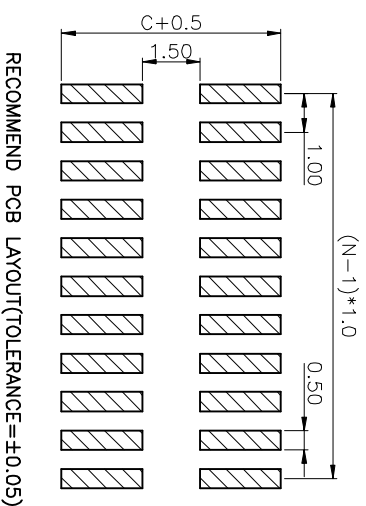

GENERAL	TOLERANCE	ANGLE	TOLERANCE
X.	±0.60	X.	±5°
X	±0.38	X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER	SCALE	1:1	SHEET	1 OF 1

慈溪蓝翎电子有限公司
 CIXI LANLING ELECTRONICS CO., LTD.
 DUAL ROW PIN HEADER
 PITCH 1.00mm STACK SMT TYPE
 LLL1013-04J
 11/18/2014

