
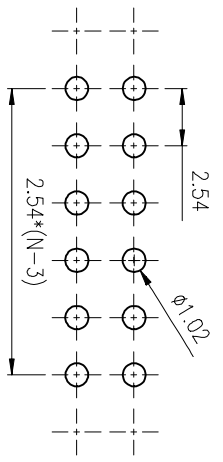
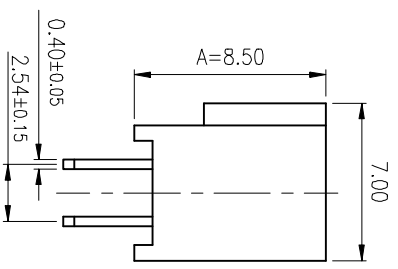
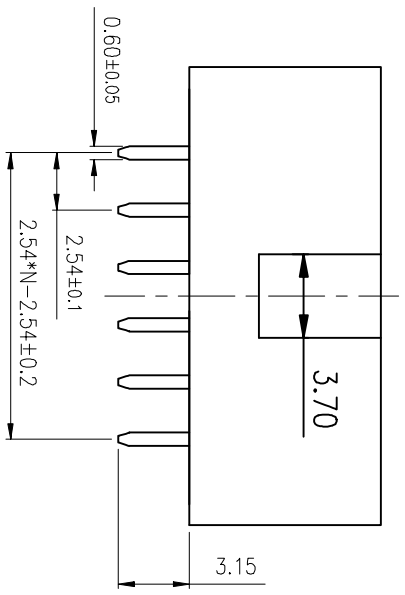


| REV. | DESCRIPTION    | DRAWN          | CHECKED | APPROVED       |
|------|----------------|----------------|---------|----------------|
| A    | NEW/RE-RELEASE | ZQJ 08/28/2014 | ~       | ZQJ 11/18/2014 |
| B    | ADD P/N CODE   | CJ 11/18/2014  | ~       |                |

NOTES:

- SPECIFICATION
  - TEMPERATURE: -40° to +105°C.
  - DIELECTRIC WITHSTANDING VOLTAGE: AC 500V AC.
  - INSULATION RESISTANCE: 1000MΩ
  - CURRENT RATING: 3Amps.
  - CONTACT RESISTANCE: 50mΩ,max.

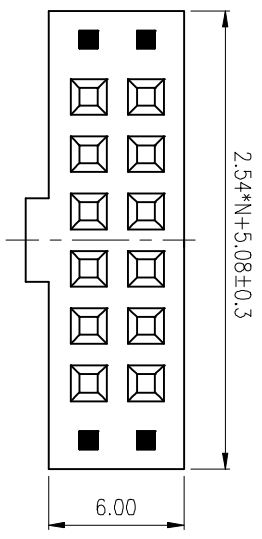

RECOMMAND PCB LAYOUT(TOLERANCE=±0.05)

| GENERAL TOLERANCE |       | ANGLE | TOLERANCE |
|-------------------|-------|-------|-----------|
| X.                | ±0.60 | X.    | ±5°       |
| X                 | ±0.38 | .X    | ±3°       |
| .XX               | ±0.25 | .XX   | ±2°       |

| DRAWING TYPE | CUSTOMER | SHEET | 1 OF 1 |
|--------------|----------|-------|--------|
| SCALE        | 1:1      |       |        |
| DRAWING NO.  |          |       |        |

| PROJECTION | TITLE                   |
|------------|-------------------------|
| UNITS      | 2.54mm FEMALE HEADER    |
| SHEET SIZE | FOR "BOX HEADER" MATING |
| A4         | LL1014-4B               |
| SERIES     |                         |

慈溪蓝翎电子有限公司  
CIXI LANLING ELECTRONICS CO., LTD.