
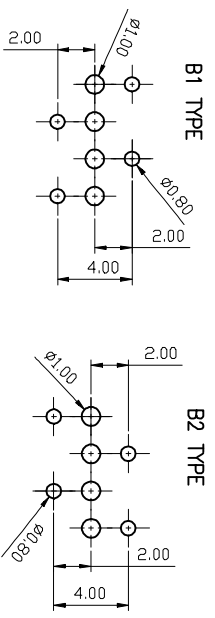


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE: -40°C~+105°C.

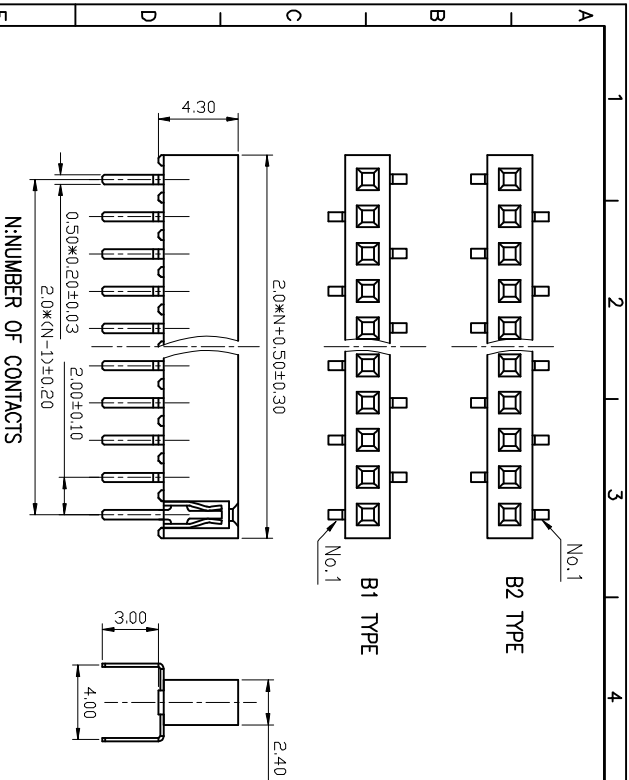

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X, .XX	±0.60	X, .XX	±5°
X, .XX	±0.38	X, .XX	±3°
X, .XX	±0.25	X, .XX	±2°

DRAWING TYPE	CUSTOMER	SHEET	1 OF 1
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1026-04-XXXXXX		

PROJECTION	TITLE	SINGLE ROW BOTTOM ENTRY TYPE
UNITS	mm	
SHEET SIZE	A4	
SERIES	LL1017-11A	

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.