

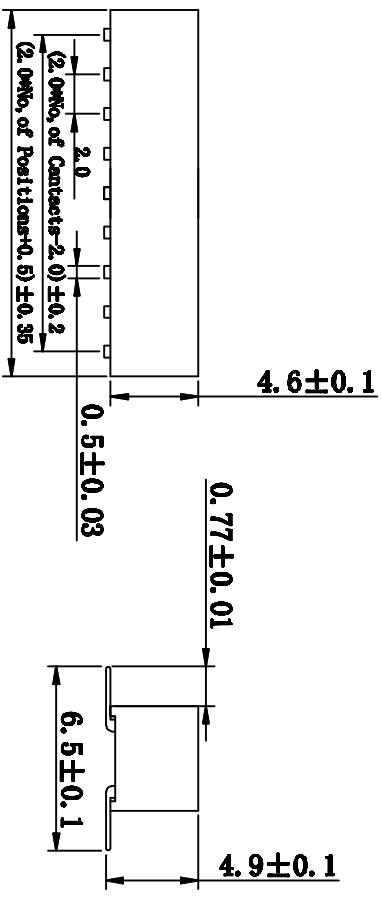


REV	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2015	~	ZQJ 11/18/2015
B	ADD P/N CODE	CJJ 11/18/2015	~	CJJ 11/18/2015

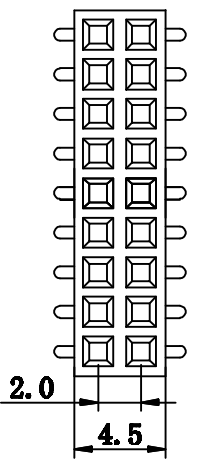

SPECIFICATIONS

Current Rating: **2Amps**
 Insulator Resistance: **1000Megohms min.**
 Dielectric Withstanding: **AC 500V**
 Operating Temperature: **-40° ~ +105° c**
 Max Processing Temp: **230° for 30 seconds**
 Contact Material: **Phosphor bronze**
 Insulator Material: **NY-6T**
 Finish: **Gold flash**
UNSPECIFIED TOLERANCE: ±0.20

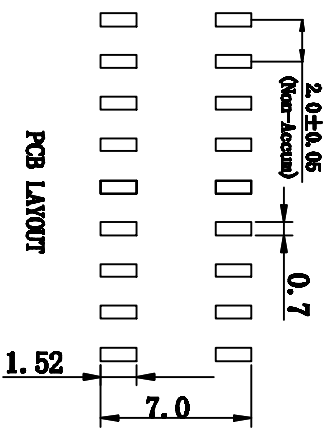

2	CONTACT		GENERAL TOLERANCE	±0.60	ANGLE TOLERANCE	±15°	PROJECTION	TITLE	2.0MM Female Header SMT H=4.6mm
1	HOUSING		X, ±0.38	X, ±18°		UNITS	mm		
			.XX ±0.25	.XX ±2°		SHEET SIZE	A4	SERIES	LL1017-9A
			DRAWING TYPE	1:1	CUSTOMER SHEET	1 OF 1			
			SCALE						
			DRAWING NO.						

慈溪蓝翎电子有限公司
 CIXI LANLING ELECTRONICS CO., LTD.
 蓝翎电子