
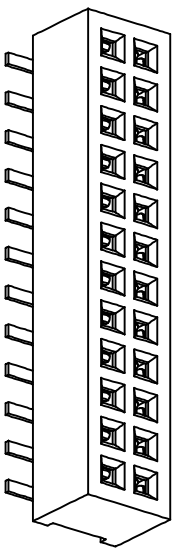
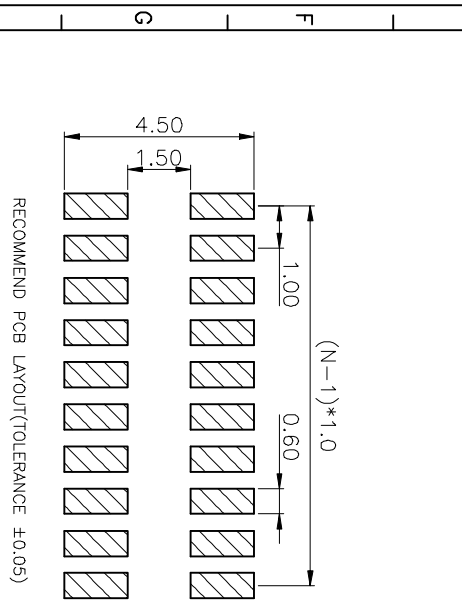


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	

NOTES:

- SPECIFICATIONS
  - . Current Rating: 1.0A
  - . Insulation Resistance: 500MΩ Min
  - . Dielectric Withstanding: 500V AC
  - . Contact Resistance: 20mΩ Max
  - . Operating Temperature: -40°C to +105°C
- MATERIALS:
  - . Housing: Thermoplastic(UL94 V-0)
  - . Contact: Copper alloy

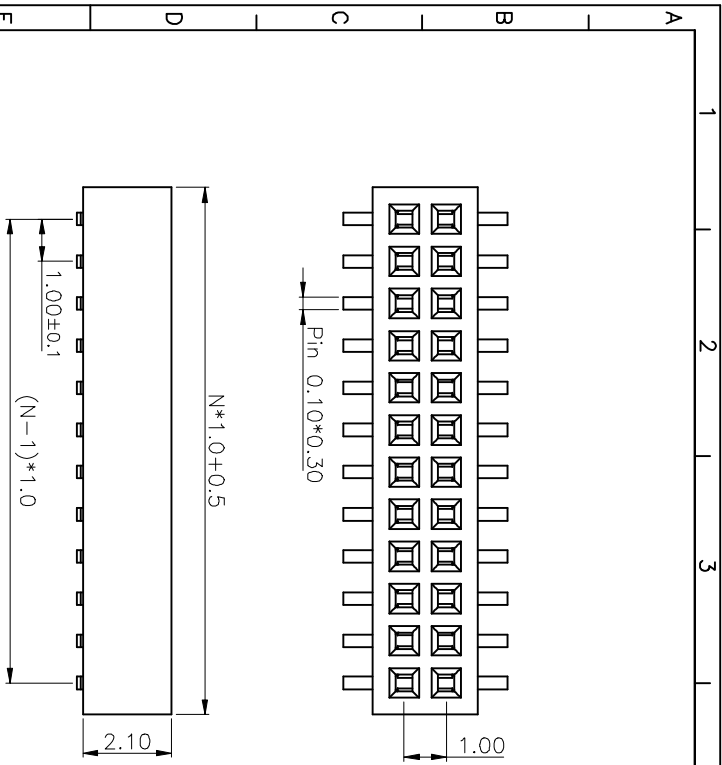

GENERAL TOLERANCE	ANGLE TOLERANCE	TOLERANCE	PROJECTION	TITLE
X, ±0.60	X, ±5°		mm	1.0mm FEMALE HEADER
.X, ±0.38	.X, ±3°		SHEET SIZE	SMT TYPE W/O POST
.XX, ±0.25	.XX, ±2°		A4	LL1018-6
DRAWING TYPE	CUSTOMER	SCALE	1:1	SHEET
DRAWING NO.			1 OF 1	

慈溪蓝翎电子有限公司  
CIXI LANLING ELECTRONICS CO., LTD.

1 2 3 4 5 6 7 8