


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B		CJU 11/18/2014	~	ZQJ 11/18/2014
C		CJU 11/18/2014	~	




NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(ms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE RANGE: -40°C~+105°C.
- PRODUCT NUMBER CODE:

LL1007 - X X X X X X X - X - X

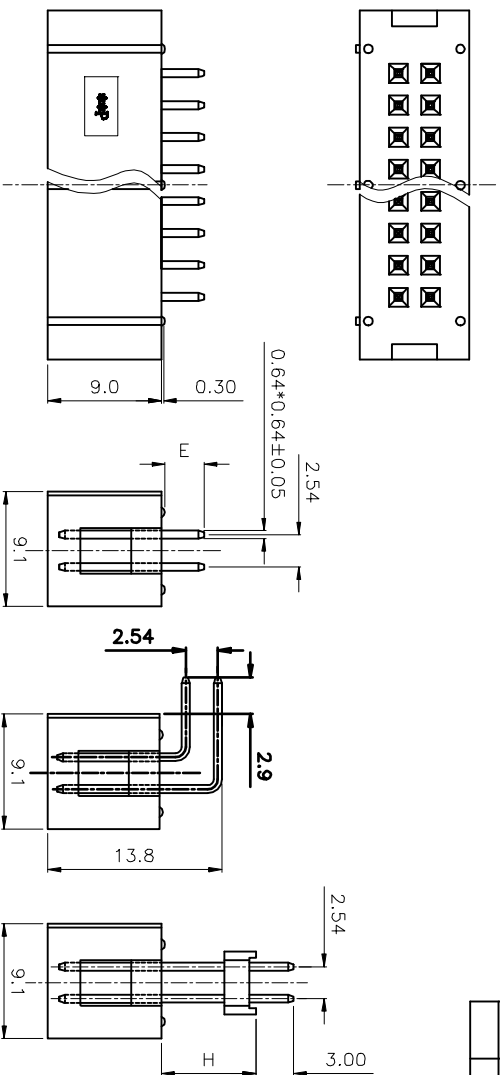

Dimension	Position		
	A	B	C
6P	15.2	13	5.08
8P	17.6	15.4	7.62
10P	20.3	18.1	10.16
12P	22.8	20.6	12.7
14P	25.3	23.1	15.24
16P	27.9	25.7	17.78
18P	30.5	28.3	20.32
20P	33	30.8	22.86

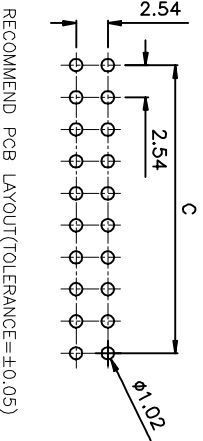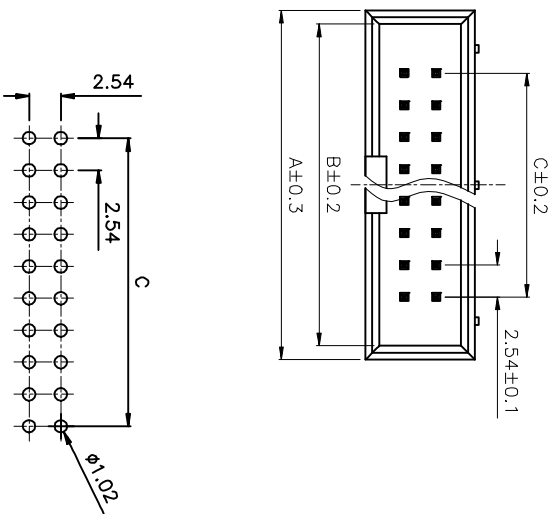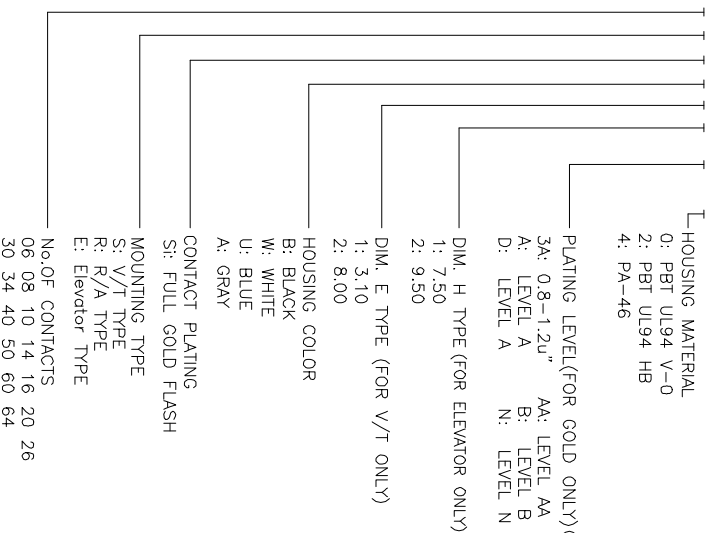

GENERAL TOLERANCE	ANGLE TOLERANCE	TOLERANCE
X, ±0.80	X, ±5°	±5°
.X, ±0.38	.X, ±3°	±3°
.XX, ±0.25	.XX, ±2°	±2°

PROJECTION	TITLE
UNITS: mm	R/A, V/T & ELEVATOR TYPE
SHEET SIZE: A4	LL1007-1-2-4

DRAWING TYPE	CUSTOMER	SHEET	1 OF 1
SCALE: 1:1			
DRAWING NO.			

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.
 Tel: 86-574-63519036 Fax: 86-574-63517070