

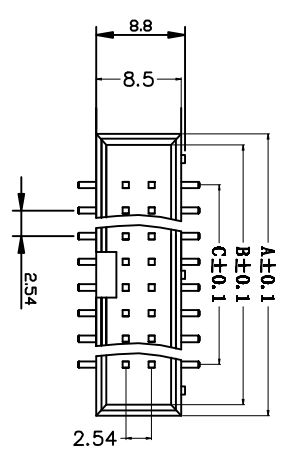



| REV. | DESCRIPTION | DRAWN          | CHECKED | APPROVED       |
|------|-------------|----------------|---------|----------------|
| A    | NEW RELEASE | ZQJ 11/18/2014 | ~       | ZQJ 11/18/2014 |
| B    |             | CJJ 11/18/2014 | ~       | ZQJ 11/18/2014 |
| C    |             | CJJ 11/18/2014 | ~       |                |


- NOTES:
- ELECTRICAL CHARACTERISTICS:
    - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
    - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
    - INSULATION RESISTANCE: 1000MΩ Min.
  - ENVIRONMENT CHARACTERISTICS:
    - TEMPERATURE RANGE: -40°C~+105°C.
  - PRODUCT NUMBER CODE:
    - LL1007 - X X X X X X X - X - X
    - 0: HOUSING MATERIAL
    - 1: PBT UL94 V-0
    - 2: PBT UL94 HB
    - 4: PA-46

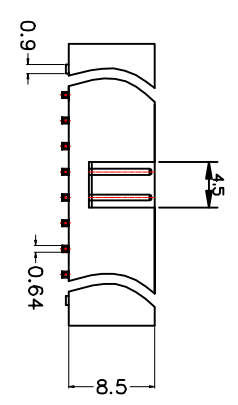

| Position | A    | B    | C    |
|----------|------|------|------|
| 6P       | 152  | 13   | 508  |
| 8P       | 176  | 154  | 762  |
| 10P      | 203  | 181  | 1016 |
| 12P      | 228  | 206  | 127  |
| 14P      | 253  | 231  | 1524 |
| 16P      | 279  | 257  | 1778 |
| 18P      | 305  | 283  | 2032 |
| 20P      | 33   | 308  | 2286 |
| 24P      | 38   | 358  | 2794 |
| 26P      | 40.6 | 38.4 | 3048 |
| 30P      | 45.6 | 43.4 | 3556 |
| 34P      | 50.7 | 48.5 | 4064 |
| 40P      | 58.4 | 56.2 | 4826 |
| 50P      | 71   | 68.8 | 6096 |
| 60P      | 84.1 | 81.9 | 7366 |
| 64P      | 89.2 | 87   | 7874 |

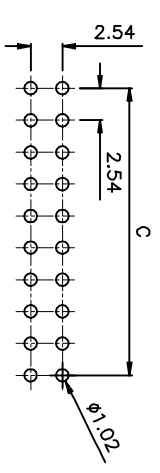

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

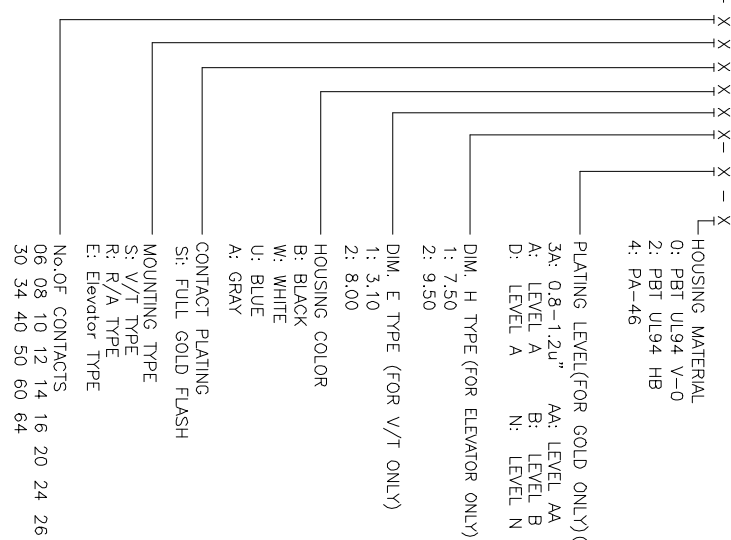

| GENERAL TOLERANCE |       | ANGLE TOLERANCE |     |
|-------------------|-------|-----------------|-----|
| X, .X             | ±0.60 | X, .X           | ±5° |
| .XX               | ±0.38 | .XX             | ±3° |
|                   | ±0.25 |                 | ±2° |

| DRAWING TYPE | CUSTOMER | SHEET | 1 OF 1 |
|--------------|----------|-------|--------|
| SCALE        | 1:1      |       |        |
| DRAWING NO.  |          |       |        |

PROJECTION UNITS mm

SHEET SIZE A4

TITLE BOX HEADER S.M.T PITCH 2.54mm

SERIES LL1007-3

慈溪蓝翎电子有限公司  
CIXI LANLING ELECTRONICS CO., LTD.  
Tel: 86-574-63619035 Fax: 86-574-63617070