

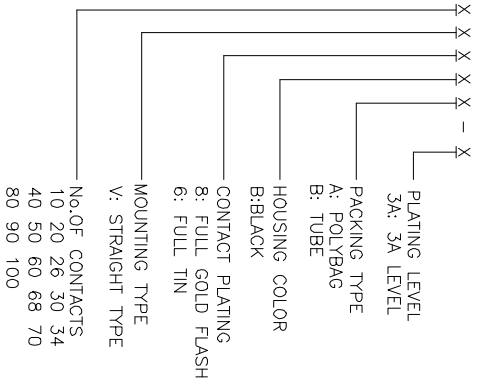

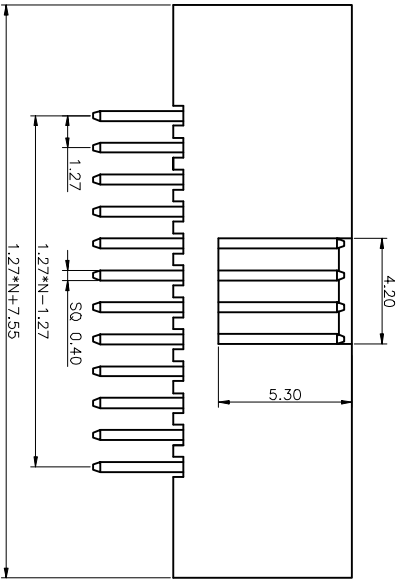


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	CJJ 11/18/2014		

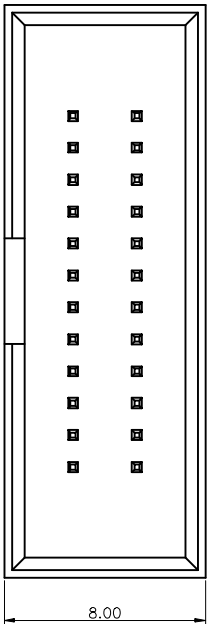

- NOTES:
- MATERIAL
 - INSULATOR:THERMOPLASTIC(UL 94V-0).
 - CONTACT MATERIAL: COPPER ALLOY.
 - SPECIFICATION
 - CURRENT RATING:1.0 Amp.
 - INSULATION RESISTANCE:1000MΩ Min.
 - DIELECTRIC WITHSTANDING:300VAC.
 - CONTACT RESISTANCE:20mΩ Max.
 - OPERATING TEMPERATURE:-40°C TO+105°C.
 - PRODUCT NUMBER CODE:
LL1008-3 - X X X X X X - X



GENERAL TOLERANCE	ANGLE	TOLERANCE
X: ±0.60	X: ±5°	
.X: ±0.38	.X: ±3°	
.XX: ±0.25	.XX: ±2°	

DRAWING TYPE	CUSTOMER	SCALE
1:1		

SHEET	1 OF 1

UNITS	PROJECTION	TITLE
mm	1:1	LL1008-3

SHEET SIZE	SERIES	BOX HEADER PITCH
A4	LL1008-3	

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.

地址 电话
Tel: 86-574-63619096 Fax: 86-574-63617070

H

G

F

E

D

C

B

A

1

2

3

4

5

6

7

8

H

G

F

E

D

C

B

A

1

2

3

4

5

6

7

8

H

G

F

E

D

C

B

A

1

2

3

4

5

6

7

8

H

G

F

E

D

C

B

A

1

2

3

4

5

6

7

8

H

G

F

E

D

C

B

A

1

2

3

4

5

6

7

8

H

G

F

E

D

C

B

A

1

2

3

4

5

6

7

8

H

G

F

E

D

C

B

A

1

2

3

4

5

6

7

8

H

G

F

E

D

C

B

A

1

2

3

4

5

6

7

8

H

G

F

E

D

C

B

A

1

2

3

4

5

6

7

8

H

G

F

E

D

C

B

A

1

2

3

4

5

6

7

8

H

G

F

E

D

C

B

A

1

2

3

4

5

6

7

8

H

G

F

E

D

C

B

A

1

2

3

4

5

6

7

8

H

G

F

E

D

C

B

A

1

2

3

4

5

6

7

8

H

G

F

E

D

C

B

A

1

2

3

4

5

6

7

8

H

G

F

E

D

C

B

A

1

2

3

4

5

6

7

8

H

G

F

E

D

C

B

A