


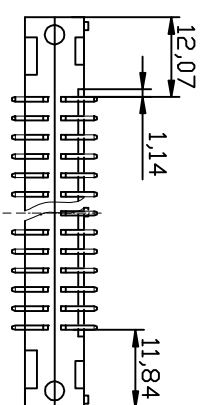


RECOMMEND PCB LAYOUT  
(TOLERANCE ±0.05)

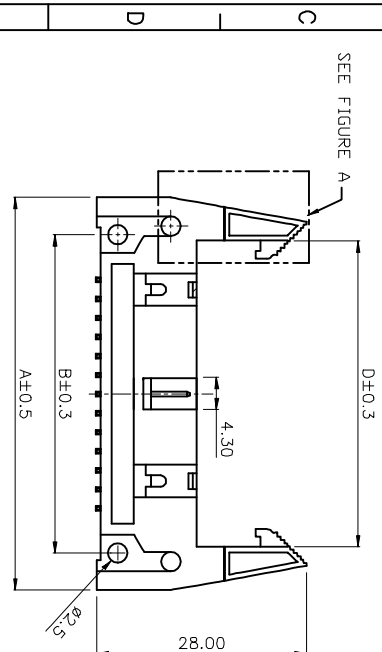

STANDARD LATCH

SPECIAL LATCH


FIGURE A

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	
B	ADD DIM	CJJ 11/18/2014	~	
C		CJJ 11/18/2014	~	
D		CJJ 11/18/2014	~	
E		CJJ 11/18/2014	~	

NOTES:

- ELECTRICAL CHARACTERISTICS:
  - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
  - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
  - TEMPERATURE: -40°C~+105°C.
- PRODUCT NUMBER CODE:
 

LL1030-1- X X X X X X X X X X




V/T TYPE

V/T TYPE	DIM.	F
Latch Type	3.10	
Standard Latch	8.10	

AVAILABLE DIMENSION TABLE

No. of Contacts	10	14	16	20	26	30	34	40	50	60	64
A	32.1	37.18	39.72	44.80	52.42	57.50	62.58	70.20	82.90	95.60	100.68
B	22.20	27.28	29.82	34.90	42.52	47.60	52.68	60.30	73.00	85.70	90.78
C	0.16	1.5,24	17.78	22.86	30.48	35.56	40.64	48.26	60.98	73.68	78.74
D	18.10	23.18	25.72	30.47	38.42	43.50	48.58	56.20	68.90	81.60	86.68

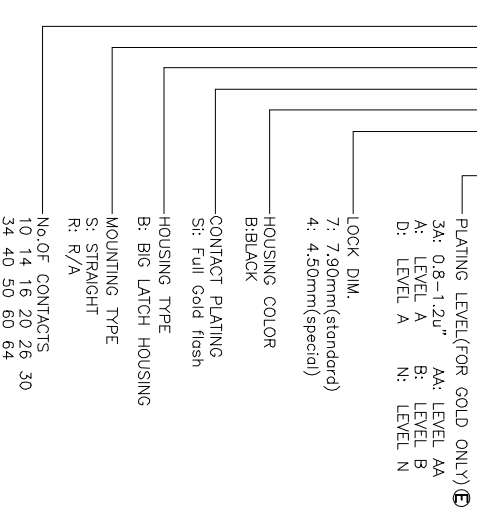

GENERAL TOLERANCE	ANGLE	TOLERANCE
X, .X, .XX	±0.60 ±0.38 ±0.25	±5° ±3° ±2°
DRAWING TYPE	CUSTOMER	
SCALE	1:1	SHEET 1 OF 1
DRAWING NO.		

PROJECTION UNITS SHEET SIZE A4 TITLE 2.54mm SHROUDED HEADER smt type

LL1030-1C SERIES

慈溪蓝翎电子有限公司  
CIXI LANLING ELECTRONICS CO., LTD.