REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	
B	ADD P/N CODE	CJJ 11/18/2014		



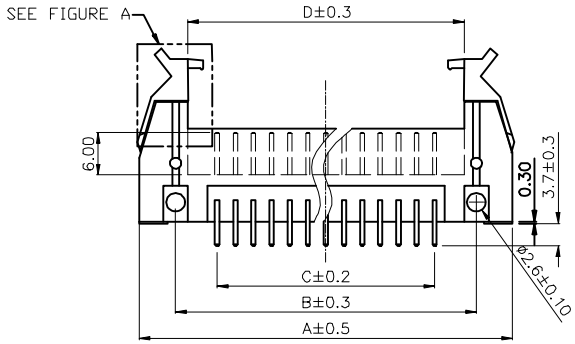

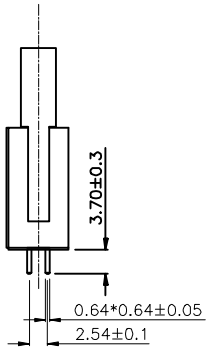

V/T TYPE



R/A TYPE



NOTES:

1. ELECTRICAL CHARACTERISTICS:
   1.1 CONTACT RESISTANCE: 20mΩ Max. INITIAL.
   1.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
   1.3 INSULATION RESISTANCE: 1000MΩ Min.
2. ENVIRONMENT CHARACTERISTICS:
   2.1 OPERATING TEMPERATURE: −40°C~+105°C.
3. PRODUCT NUMBER CODE:

LL1030-2A- X X X X X X

- LOCK DIM.
  - 8: 8.60mm(standard latch)
  - 2: 4.20mm(short latch)
  - S: 4.2mm(special latch)
- HOUSING COLOR
  - B: BLACK
  - A: GRAY
- CONTACT PLATING
  - Ti: SELECTIVE GOLD FLASH
  - Si: FULL GOLD FLASH
- HOUSING TYPE
  - S: SMALL LATCH HOUSING
- MOUNTING TYPE
  - S: STRAIGHT
  - R: R/A
- No.OF CONTACTS
  - 10 14 16 20 26 30 34 40 50 60 64

AVALIABLE DIMENSION TABLE

No.of Contacts	10	14	16	20	26	30	34	40	50	60	64
A	31.92	37.00	39.54	44.62	52.24	57.32	62.40	70.02	82.72	95.42	100.50
B	21.72	26.80	29.34	34.42	42.04	47.12	52.20	59.82	72.52	85.22	90.30
C	10.16	15.24	17.78	22.86	30.48	35.56	40.64	48.26	60.96	73.66	78.74
D	18.22	23.30	25.84	30.92	38.54	43.62	48.70	56.32	69.02	81.72	86.80



SPECIL LATCH



SHORT LATCH



STANDARD LATCH

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.			

PROJECTION		TITLE	SHOUDED HEADER PITCH 2.54mm SQUARE PIN TYPE
UNITS	mm		
SHEET SIZE	A4	SERIES	LL1030-2A

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO.,LTD.