REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	整理图纸	CJJ 11/18/2014	~	

N: HALF OF CONTACTS

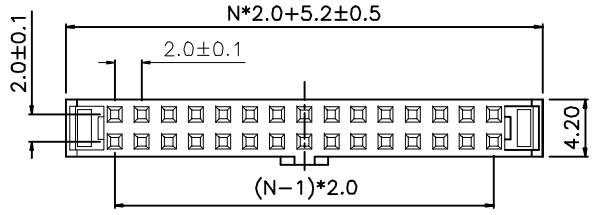

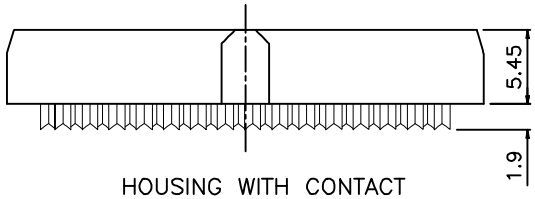

HOUSING WITH CONTACT



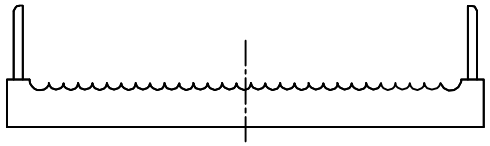



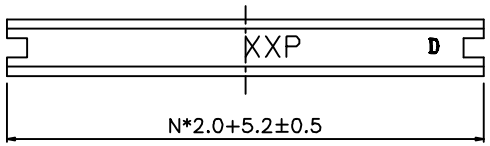

COVER

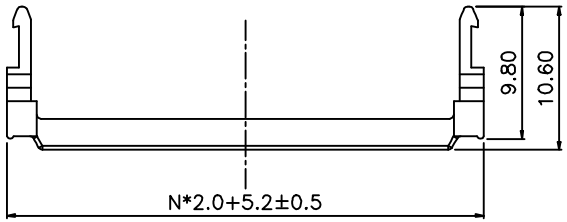

UPPER COVER



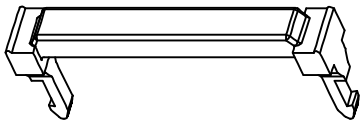

NOTES:

1. MATERIAL
   - 1.1 INSULATOR:THERMOPLASTIC(UL 94V−0).
   - 1.2 CONTACT: COPPER ALLOY.
2. SPECIFICATION
   - 2.1 TEMPERATURE RANGE:−40~+105°C.
   - 2.2 CONTACT RESISTANCE:20mΩ max.
   - 2.3 INSULATION RESISTANCE:1000MΩ min.
   - 2.4 DIELECTRIC WITHSTANDING VOLTAGE:AC 500V PER MINUTE.

LL1034-1- X X X X X

- HOUSING COLOR
  - G: GRAY
  - B: BLACK
  - L: BLUE
- CONTACT PLATING
  - 8: FULL GOLD FLASH
  - 6: FULL TIN
  - 2: NICKEL+GOLD FLASH
- POLARIZATION
  - A: W/
  - B: W/O
- STRAIN RELIEF
  - M: W/
  - N: W/O
- No. OF CONTACTS
  - 10 12 16 20 22 24 26 34 36 40 44 50 56 68

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.			

PROJECTION		TITLE	IDC SOCKET PITCH 2.0mm WITH 1.0mm FLAT CABLE
UNITS	mm		
SHEET SIZE	A4	SERIES	LL1034-1

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO.,LTD.