

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014		
B	ADD P/N CODE	CJJ 11/18/2014		

NOTES:

1. MATERIAL:

1.1 Pin(outer sleeve): Brass, machined CuZn38Pb2.

1.2 Clip(contact 4finger): Beryllium Copper or phosphor bronze.

1.3 Insulator(black): Glass filled thermoplastic polyester UL94V-0.

2. ELECTRICAL:

2.1 Current rating: 3Amps/contact max.


2.2 Contact resistance: $\leq 20m\Omega$ /contact.

2.3 Insulation resistance: $> 1000M\Omega$ at $V=100V$.

2.4 Operating voltage: 60V AC/DC.

3. PRODUCT NUMBER CODE:

LL1019-3 - X X X

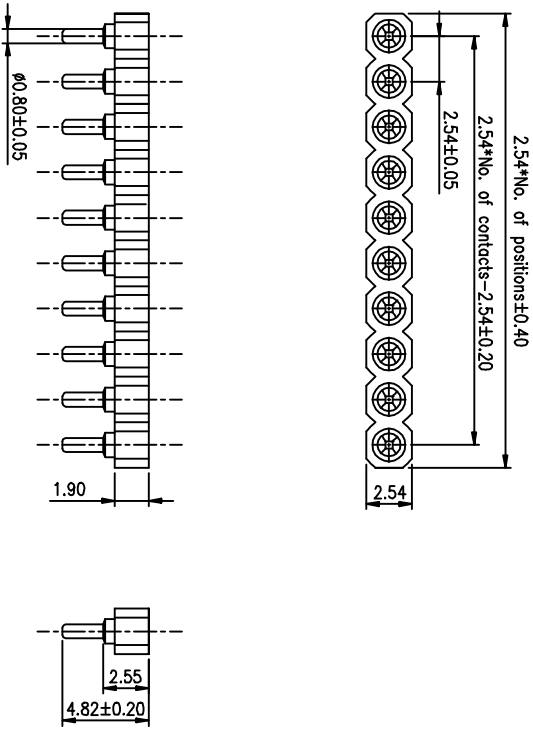

- CLIP PLATING
- 6: Full Tin
 - 8: Full gold flash
 - C: Full gold 3u"
 - A: Full gold 10u"
- PIN PLATING
- 6: Full Tin
 - 8: Full gold flash
 - C: Full gold 3u"
 - A: Full gold 10u"
- No.OF CONTACTS
- 1*1 to 1*40

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X, ±0.60	X, ±0.38	X, ±5°	X, ±3°	UNITS	mm	SIP IC SOCKET(Machine pin)	
.XX ±0.25	.XX ±2°			SHEET SIZE	A4	PIN LENGTH 4.82mm	
DRAWING TYPE		CUSTOMER		SERIES			
SCALE		1:1		LL1019-3			
DRAWING NO.		SHEET		慈溪蓝翎电子有限公司			
		10F1		CIXI LANLING ELECTRONICS CO., LTD.			

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.