


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	

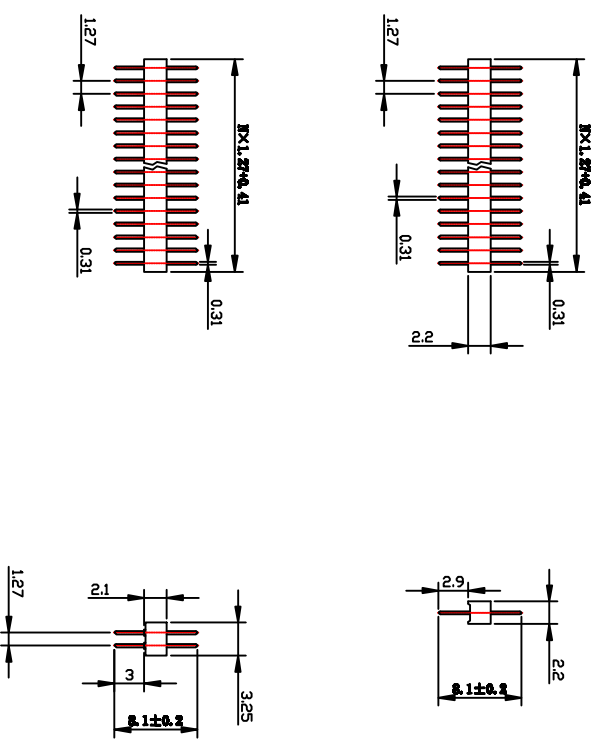

**Technical Data**  
 Insulator: Black glass  
 filled polyester  
 Flammability: UL 94V-0  
 Sleeve: Brass CuZn36Pb3  
 Current  
 rating: 3Amps/contact max  
 Contact resistance: max  
 10MΩ  
 Dielectric strength: min  
 1000VRMS  
 Plating: Gold plated/Tin  
 plated  
 Operating  
 temperature: -55°C~+105°C  
 Soldering  
 temperature: +245°C ±  
 5°C, 5s max

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	TITLE
X, ±0.60	X, ±5°	UNITS mm	DIP STRIP ADAPTER
.X, ±0.38	X, ±3°	SHEET SIZE A4	PITCH 1.27mm
.XX, ±0.25	.XX, ±2°	SERIES LL1020-9	
DRAWING TYPE CUSTOMER		DIP STRIP ADAPTER	
SCALE 1:1	SHEET 10F1		
DRAWING NO.			

慈溪蓝翎电子有限公司  
 CIXI LANLING ELECTRONICS CO., LTD.  
 Tel: 86-574-68519095 Fax: 86-574-68517070