REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	

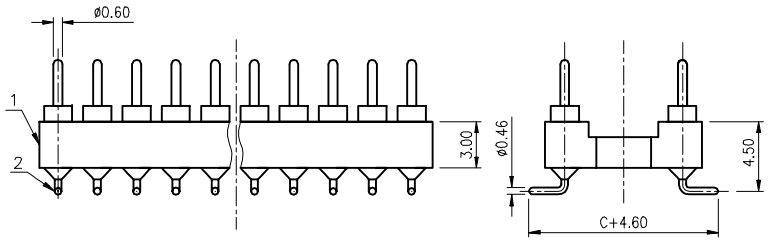



NOTES:

1. ELECTRICAL CHARACTERISTICS:
   1.1 CONTACT RESISTANCE: 20mΩ Max.
   1.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
   1.3 INSULATION RESISTANCE: 1000MΩ Min.
2. ENVIRONMENT CHARACTERISTICS:
   2.1 TEMPERATURE: −40°C~+105°C.
3. PRODUCT NUMBER CODE:

LL1022-3 − X X X

- PIN PLATING
  - 1: Tin 150u"
  - 2: Tin 200u"
  - 3: G/F
  - 4: Gold 3u"
  - 5: Gold 10u"
  - 6: Gold 15u"
- WIDTH(DIM C)
  - N: 7.62mm
  - W: 15.24mm
- No.OF CONTACTS
  - 06 08 14 16 18
  - 20 24 28 32 40
  - 1*1 to 1*40
  - 2*1 to 2*40
- SERIES No.
  - LL1022-3

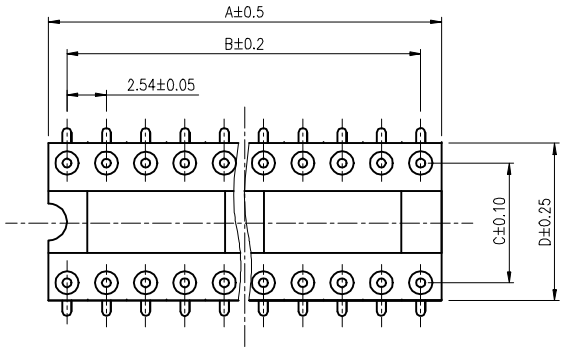

N:NUMBER OF CONTACTS/2

Dimension

Position	A	B	C	D
06	7.60	5.08	10.16	7.62
08	10.16	7.62	10.16	7.62
14	17.16	15.24	10.16	7.62
16	20.32	17.78	10.16	7.62
18	22.86	20.32	10.16	7.62
20	25.40	22.86	10.16	7.62
24	30.48	27.94	10.16	7.62
28	35.56	33.02	10.16	7.62
24	30.48	27.94	17.78	15.24
28	35.56	33.02	17.78	15.24
32	40.62	38.10	17.78	15.24
40	50.80	48.26	17.78	15.24

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

ITEM	PART NAME	PART NO.	MATERILAS	FINISHED
2	CONTACT		COPPER ALLOY	GOLD PLATED
1	HOUSING		THERMOPLASTIC	UL 94 V-0

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	10F1
DRAWING NO.			

PROJECTION		TITLE	MACHINE PIN HEADER IC SMT PITCH 2.54mm
UNITS	mm		
SHEET SIZE	A4	SERIES	LL1022-3

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO.,LTD.