




REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	✓	

[FEMALE]

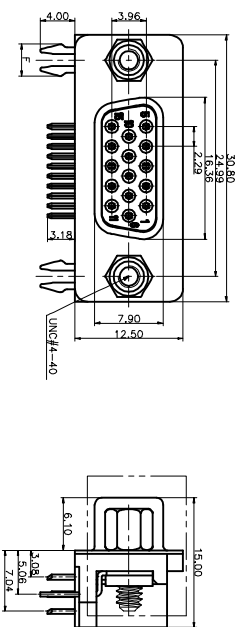

WITH SCREW AND RIVET TYPE


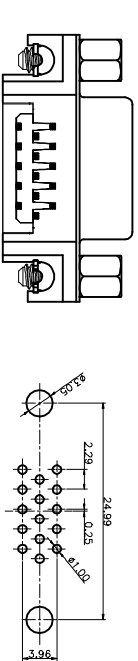


RECOMMEND PCB LAYOUT
(TOLERANCE ±0.05)




WITH SCREW TYPE

[MALE]

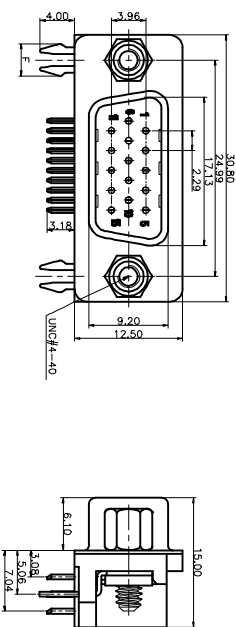


WITH RIVET TYPE

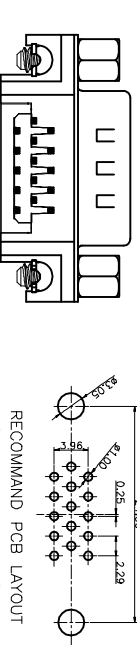

RECOMMEND PCB LAYOUT
(TOLERANCE ±0.05)

NOTES:

- PRODUCTS PERFORMANCE:
 - VOLTAGE RATING: 250V AC.
 - CURRENT RATING: 1.5A MAX.
 - CONTACT RESISTANCE: 20mΩ MAX.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ MIN.
 - OPERATING TEMPERATURE: -40°C~+105°C.
- PRODUCT NUMBER CODE:
 - LL1046-4- X X X X X X X X X X

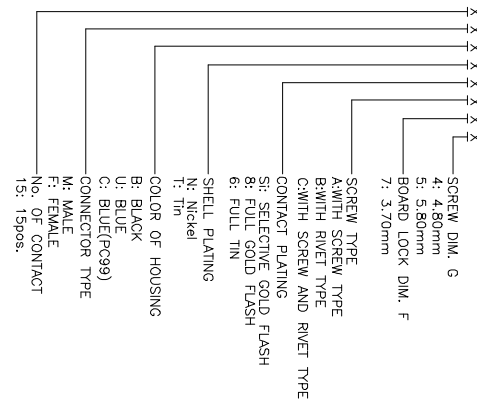

GENERAL TOLERANCE ANGLE TOLERANCE		PROJECTION		TITLE	
X, ±0.60	X, ±5°	UNITS	mm	D-SUB H/D RIGHT ANGLE 3.08mm TYPE	
.X, ±0.50	.X, ±3°	SHEET SIZE	A4	SERIES LL1046-4	
.XX, ±0.30	.XX, ±2°	DRAWING TYPE CUSTOMER			
SCALE 1:1	SHEET 1 OF 1	DRAWING NO.			

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.
Tel: 86-574-63819036 Fax: 86-574-63817070