


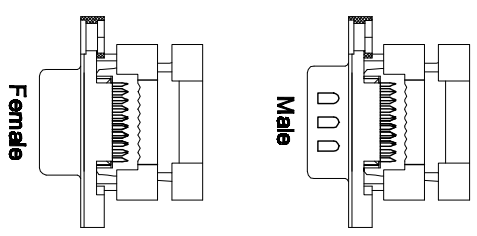




REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	CJJ 11/18/2014
B	ADD Sopin drawing	ZQJ 11/18/2014	~	CJJ 11/18/2014
C	ADD BR TYPE	CJJ 11/18/2014	~	CJJ 11/18/2014
D	REDRAWING	CJJ 11/18/2014	~	CJJ 11/18/2014
E	ADD P/N CODE	CJJ 11/18/2014		

NOTES:

- ELECTRICAL CHARACTERISTICS:
  - 1.1 CONTACT RESISTANCE: 20mΩ Max. INITIAL
  - 1.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
  - 1.3 INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
  - 2.1 TEMPERATURE RANGE: -40°C~+105°C.

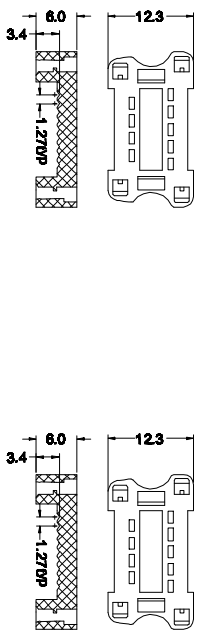

Dimension	Dimension					Position	Dimension				
	A	B	C	D	E		A	B	C	D	E
09M	30.9	24.99	16.92	11.08	10.16	09F	30.9	24.99	16.92	11.08	10.16
15M	39.2	33.32	25.25	19.39	17.78	15F	39.2	33.32	25.25	19.39	17.78
25M	53.1	47.04	38.96	33.24	30.48	25F	53.1	47.04	38.96	33.24	30.48
37M	69.4	63.50	55.42	49.86	45.72	37F	69.4	63.50	55.42	49.86	45.72

GENERAL TOLERANCE ANGLE TOLERANCE

X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER
SCALE	1:1
DRAWING NO.	SHEET 1 OF 1

PROJECTION	TITLE
UNITS	D-SUB IDC TYPE
SHEET SIZE	LL1046-1
A4	SERIES

**慈溪蓝翎电子有限公司**  
CIXI LANLING ELECTRONICS CO., LTD.