




REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	CJJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014		

NOTES:

1. MECHANICAL
  - 1.1 Operation Force: 800g Max
  - 1.2 Stroke: 1.90mm
  - 1.3 Temperature Range: -40°C~+105°C
2. MATERIALS
  - 2.1 Base: Engineering Plastics, Black
  - 2.2 Cover: Engineering Plastics, Red or Blue
  - 2.3 Acuator: Engineering Plastics, White
  - 2.4 Contact: Copper Alloy, Gold plating

3. ELECTRICAL
  - 3.1 Electrical Life: 2000 cycles.
  - 3.2 Contact resistance: 100mΩ Max.
  - 3.3 Insulation Resistance: 1000MΩ at 500VDC.
  - 3.4 Dielectric Withstanding Voltage: 500VAC per 1 minute
  - 3.5 Circuit: Single pole single throw

4. PRODUCT NUMBER CODE:

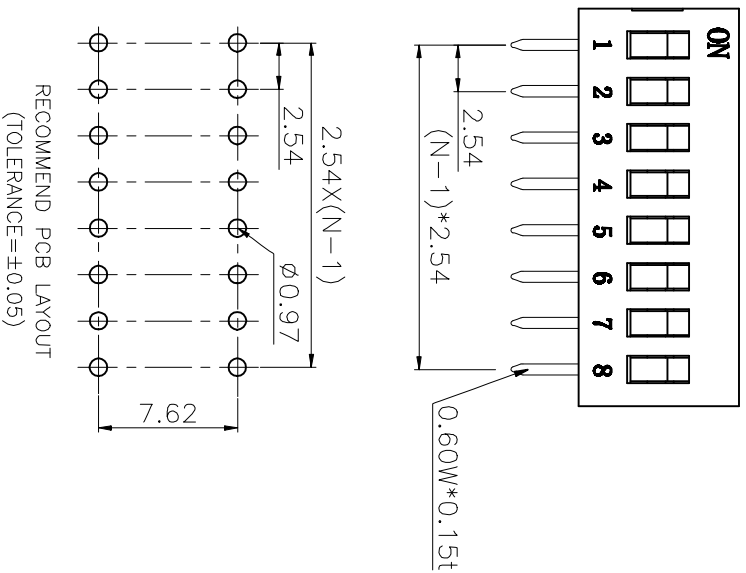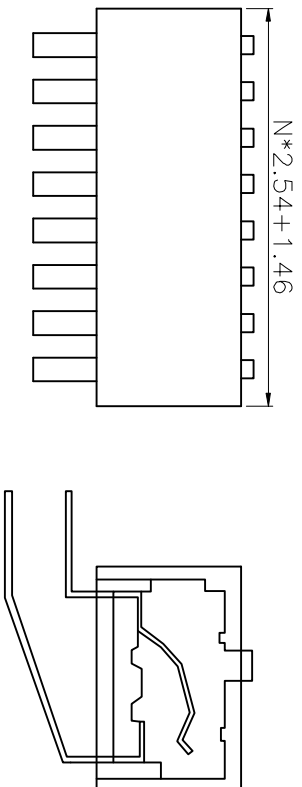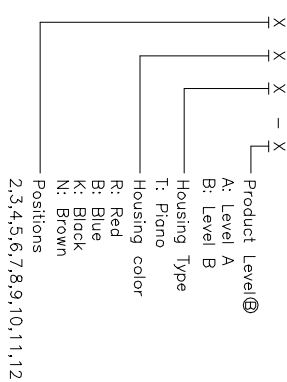

RECOMMEND PCB LAYOUT  
(TOLERANCE=±0.05)

GENERAL TOLERANCE	ANGLE TOLERANCE
X, ±0.60	X, ±5°
.X, ±0.38	.X, ±3°
.XX, ±0.25	.XX, ±2°

DRAWING TYPE	CUSTOMER
SCALE	1:1
DRAWING NO.	SHEET 1 OF 1

PROJECTION	TITLE	DIP SWITCH PITCH 2.54mm
UNITS	mm	PLANO TYPE
SHEET SIZE	A4	SERIES
		LL1051-3

慈溪蓝翎电子有限公司  
CIXI LANLING ELECTRONICS CO., LTD.  
Tel: 86-574-63519038 Fax: 86-574-63517070