
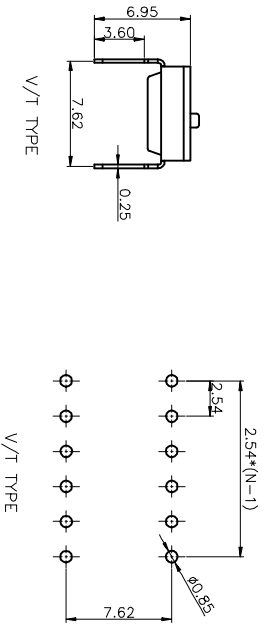


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014		

NOTES:

- 1.MECHANICAL
  - 1.1 Operation Force: 800g Max
  - 1.2 Stroke: 1.00mm
  - 1.3 Temperature: -40°C~+105°C
- 2.MATERIALS
  - 2.1 Base: Engineering Plastics,Black
  - 2.2 Cover: Engineering Plastics,Black
  - 2.3 Button: Engineering Plastics,White
  - 2.4 Terminal: Alloy Copper, Gold plating
- 3.ELECTRICAL
  - 3.1 Electrical Life: 2000 operations cycles per switch
  - 3.2 Non-Switching Rating: 100mA, 50VDC
  - 3.3 Switching rating: 25mA,24VDC
  - 3.4 Contact resistance: 50mΩ Max. at initial; 100mΩ Max. after life test.
  - 3.5 Insulation Resistance: 100MΩ,500VDC
  - 3.6 Dielectric Strength: 500VAC/1 minute
  - 3.7 Circuit: Single pole single throw

N=Number of contacts

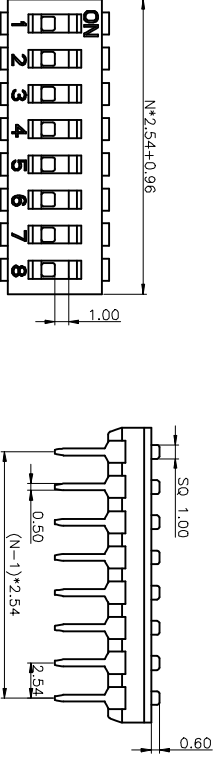

RECOMMEND P.C.B LAYOUT  
Tolerance±0.05

GENERAL TOLERANCE	ANGLE	TOLERANCE
X, ±0.60	X, ±5°	
.X, ±0.38	.X, ±3°	
.XX, ±0.25	.XX, ±2°	

DRAWING TYPE	CUSTOMER
SCALE	1:1
DRAWING NO.	SHEET 1 OF 1

PROJECTION	TITLE
UNITS mm	SWITCH PITCH 2.54mm V/T TYPE
SHEET SIZE A4	SERIES LL1051-5

**慈溪蓝翎电子有限公司**  
**CIXI LANLING ELECTRONICS CO., LTD.**  
 Tel: 86-574-63810006 Fax: 86-574-63810700

