

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	

Material**

Housing: 30%Glass filled PBT UL94V-0.

Contacts: Phosphor Bronze.


Electrical Characteristics:

Current Rating: 5AMP.

Insulator Resistance: 5000M Ω .min. at DC 500V.

Contact Resistance: 20m Ω .max. at DC 100mA.

Operating Temperature: -55°C~+105°C.

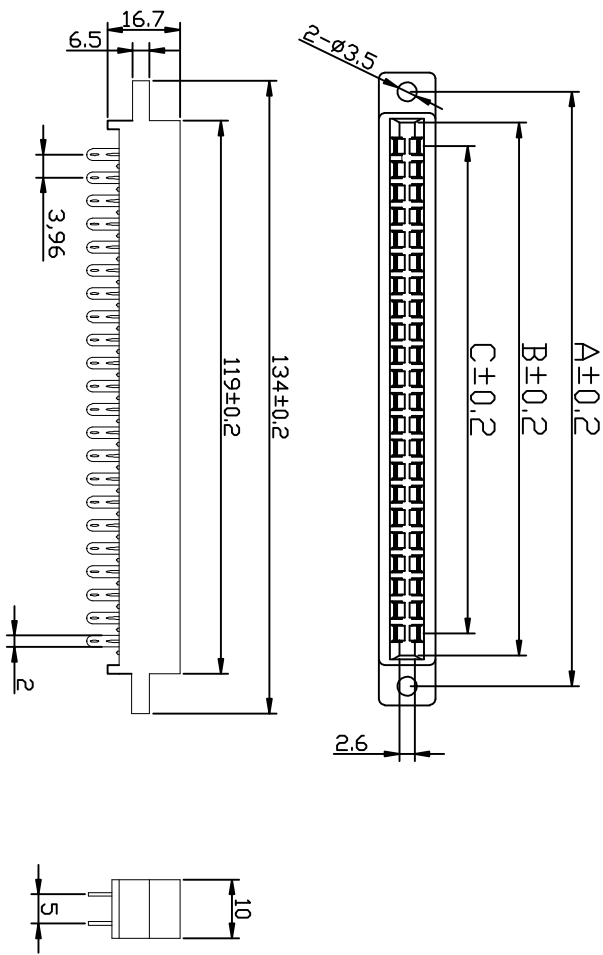

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION UNITS	TITLE
X, ±0.60	X, ±5°	mm	EDGE CARD CONNECTOR PITCH 3.96mm
X, ±0.38	X, ±5°	A4	
XX, ±0.25	XX, ±2°	SERIES L11006-3 56pin	

ITEM	PART NAME	PART NO.	MATERIALS	DRAWING TYPE	SCALE	CUSTOMER	SHEET	1 OF 1
2	CONTACT		COPPER ALLOY	GOLD OR TIN PLATED				
1	HOUSING		THERMOPLASTIC	UL 94 V-0				

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.