

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2015	~	ZQJ 11/18/2015
B	ADD P/N 3003	CJJ 11/18/2015	~	CJJ 11/18/2015




材质 Material

SLOT-2.54-180度

绝缘体 Insulator	Glass Filled PBT UL94V-0
绝缘体 Contacts	Brass/Phosphor Bronze T-0.4
电镀层 Plating	Tin Plated

材质 Electrical

接触电阻 Contact Resistance	20mΩ max. at DC/100mA
绝缘电阻 Insulator Resistance	1000MΩ min. at 500V DC
耐压 Withstanding Voltage	500V AC/rms 50Hz for 1 min
工作电流 Current Rating	1 AMP
使用温度范围 Operating Temp	-40°C~+105°C

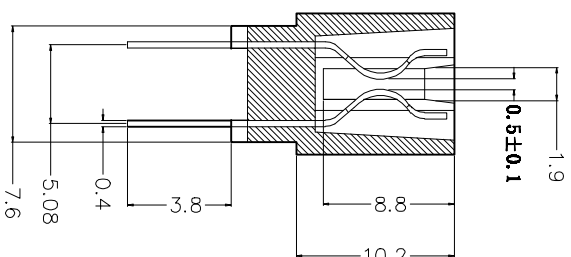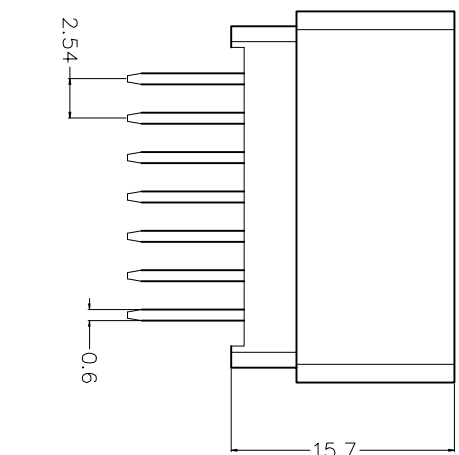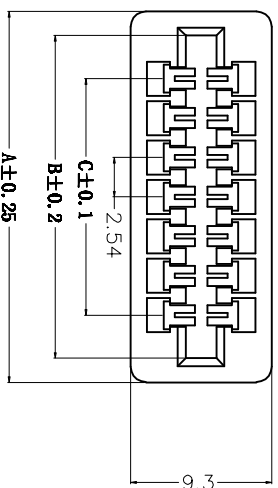

Position	06M	08M	10M	12M	14M	16M	20M	22M	24M
A	13.92	16.46	19.00	21.54	24.08	26.62	31.70	34.24	36.78
B	10.52	13.06	15.06	18.14	20.68	23.22	28.30	30.84	33.38
C	5.08	7.62	10.16	12.70	15.24	17.78	22.86	25.40	27.94

Position	26M	30M	36M	40M	44M	50M	60M	62M	72M	98M
A	39.32	44.40	52.02	57.10	62.18	69.80	82.50	85.04	97.74	138.38
B	35.92	41.00	48.62	53.70	58.78	66.40	79.10	81.64	94.34	134.98
C	30.48	35.56	43.18	48.26	53.34	60.96	73.66	76.20	88.90	129.54

GENERAL TOLERANCE		ANGLE TOLERANCE	
X, ±0.60	X, ±5°	X, ±3°	X, ±2°
.X, ±0.38	.X, ±3°	.XX, ±2°	
.XX, ±0.25			

DRAWING TYPE	CUSTOMER	SCALE	SHEET	1 OF 1
DRAWING NO.	1:1			

PROJECTION	TITLE
UNITS	2.54mm Edge Card Connector Slot
SHEET SIZE	A4
SHEET SIZE	SERIES LLI038-4

ITEM	PART NAME
1	HOUSING
2	CONTACT

DRAWING NO.	SCALE	SHEET	1 OF 1
4	1:1		


慈溪蓝翎电子有限公司
 CIXI LANLING ELECTRONICS CO., LTD.
 蓝翎电子