

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2015	~	ZQJ 11/18/2015
B	ADD P/N CODE	CJJ 11/18/2015	~	CJJ 11/18/2015

### 红色IPC公头-短脚

#### 材质 Material



绝缘体 Insulator	Glass Filled PBT UL94V-0
绝缘体 Contacts	Brass/Phosphor Bronze T=0.4
电镀层 Plating	Tin Plated

#### 材质 Electrical

接触电阻 Contact Resistance	20mΩ max. at DC100mA
绝缘电阻 Insulator Resistance	1000MΩ min. at 500V DC
耐压 Withstanding Voltage	500V AC/rms 50Hz for 1 min
工作电流 Current Rating	1 AMP
使用温度范围 Operating Temp	-40°C~+105°C

Note Flat cooble 1.27mm

PINS	4	6	8	10	12	14	16	18	20
A	8.45	10.99	10.99	16.07	18.61	21.15	23.69	26.23	28.77
B	2.54	5.08	7.62	10.16	12.70	15.24	17.78	20.32	22.86

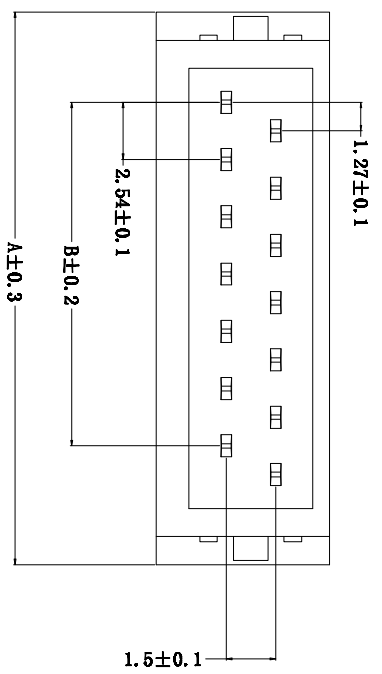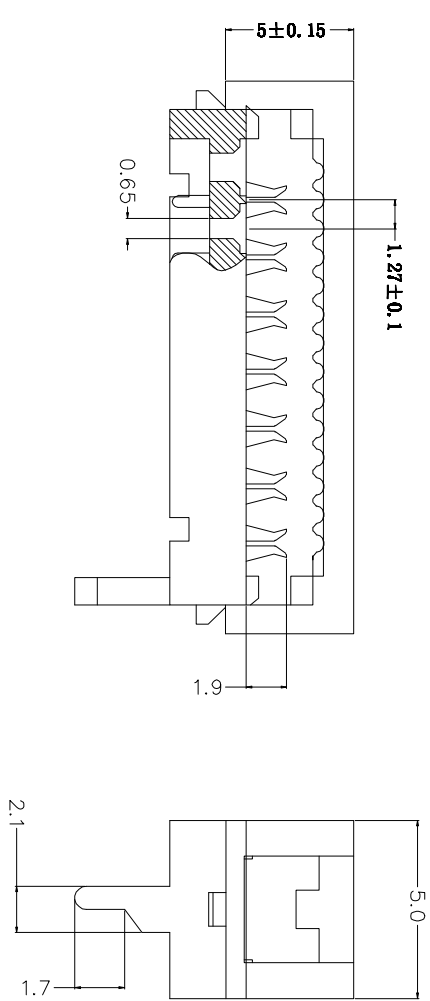

GENERAL TOLERANCE	ANGLE TOLERANCE
X, ±0.60	X, ±5°
.X, ±0.38	.X, ±3°
.XX, ±0.25	.XX, ±2°

DRAWING TYPE	CUSTOMER	SCALE	SHEET	1 OF 1
DRAWING NO.				

PROJECTION UNITS	TITLE
SHEET SIZE A4 <td>MICRO Match Connector</td>	MICRO Match Connector
SHEET SIZE A4 <td>SERIES LL1033-2B</td>	SERIES LL1033-2B


**慈溪蓝翎电子有限公司**  
 CIXI LANLING ELECTRONICS CO., LTD.  
 蓝翎电子

ITEM	PART NAME
1	HOUSING
2	CONTACT