


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2015	~	ZQJ 11/18/2015
B	ADD P/N CODE	CJJ 11/18/2015	~	CJJ 11/18/2015

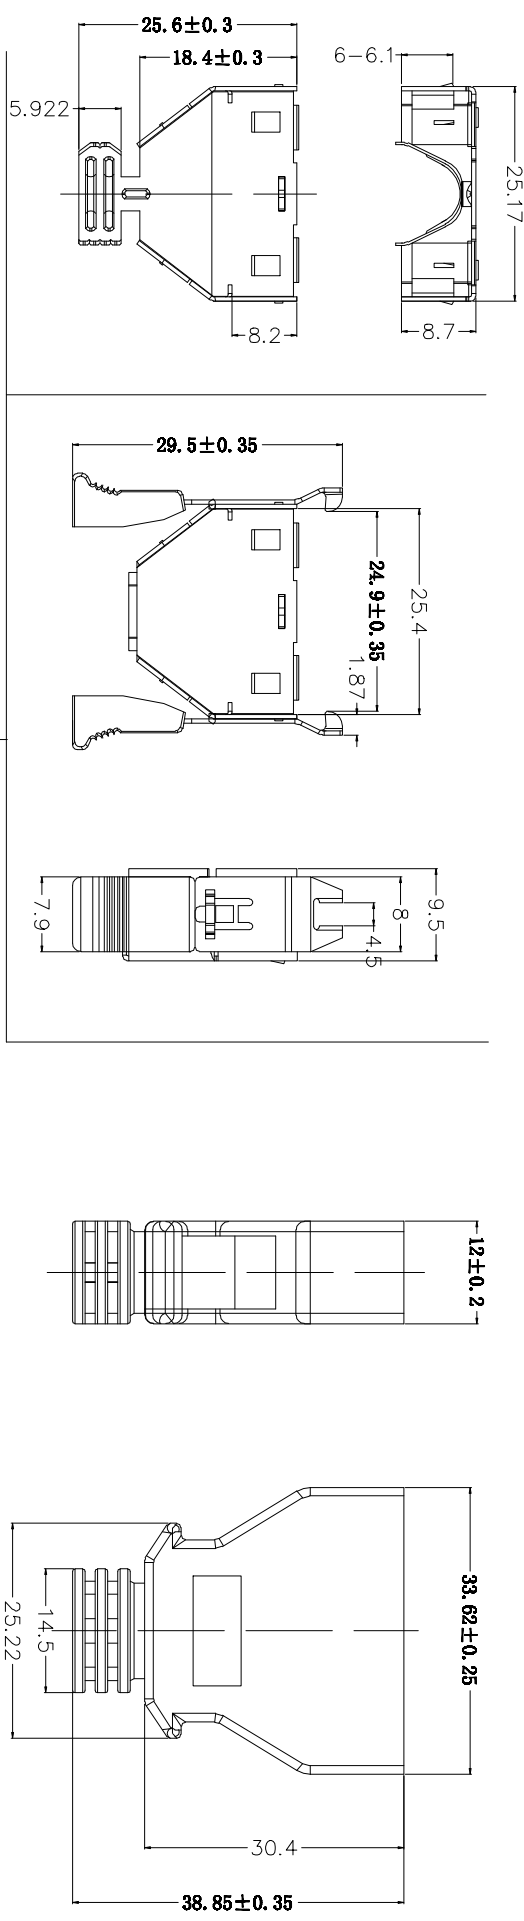


SPECIFICATION

Contact Resistance: $35m\Omega$ Max
 Insulation Resistance: $200M\Omega$ Min at 500V DC
 Contact Current Rating: 1 AMP, AC DC
 Voltage Rating: 40 V AC
 Withstanding Voltage: 500V AC for 1min
 Operating Temperature: $-25^{\circ}C \sim +85^{\circ}C$
 Packing: Tray
 Control Dimensions Indicated From

MATERIAL AND FINISH

Insulation Material: Glass Reinforced Polyester (GFR) UL-70, Black
 Cover Material: PBT UL-94-V0 Black
 Hood Plastic Material: ABS, Black
 Button Plastic Material: ABS, Black
 Contact Material: Phosphor Bronze (C51921-ETP) T=0.25
 Contact Area Plated: Gold 1-3u" Plated over Nickel 50u"

Solder Area Plated: Tin Plated (80u" min Lead Free)
 Tip or Dorn Shell Material: SPC T=0.5
 Tip or Dorn Shell Plated: Nickel 80" Plated over Cu 50"
 Contact Shell Material: SPC T=0.5
 Contact Shell Plated: Gold 1-3u" Plated over Cu 50u"
 Hook Spring Material: Stainless Steel T=0.3

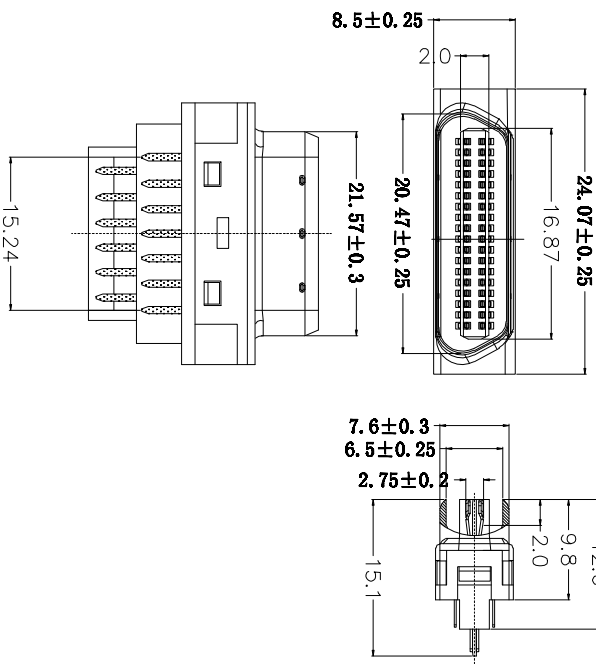

GENERAL TOLERANCE ANGLE TOLERANCE

X	±0.60	X	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION UNITS	TITLE
SHEET SIZE A4 <td>SCSI Socket Connector</td>	SCSI Socket Connector
SERIES LL102S-1 <td></td>	

2	CONTACT	DRAWING TYPE	CUSTOMER
1	HOUSING	SCALE	1:1
ITEM	PART NAME	SHEET	1 OF 1
		DRAWING NO.	

慈溪蓝翎电子有限公司
 CIXI LANLING ELECTRONICS CO., LTD.