
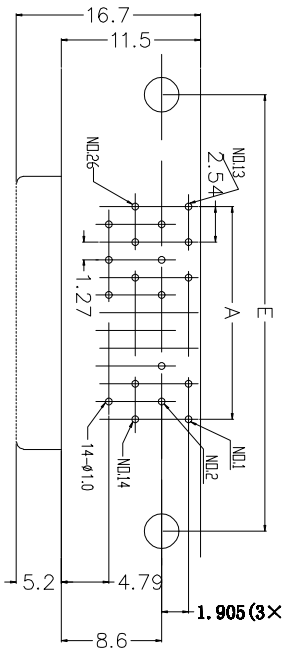

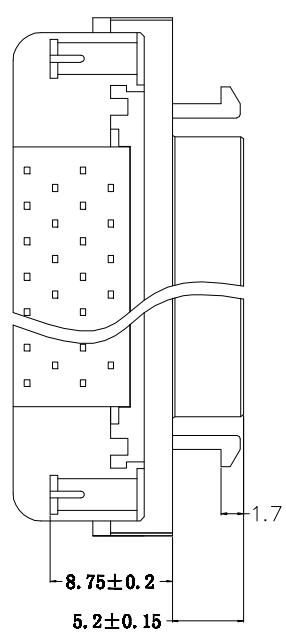
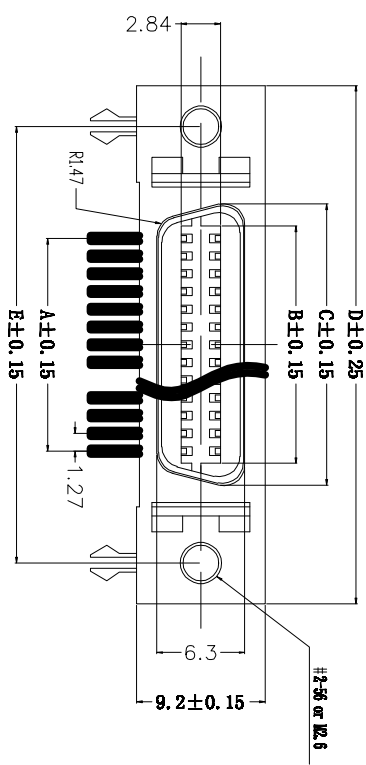


REV	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2015	~	ZQJ 11/18/2015
B	ADD P/N CODE	CJJ 11/18/2015	~	CJJ 11/18/2015

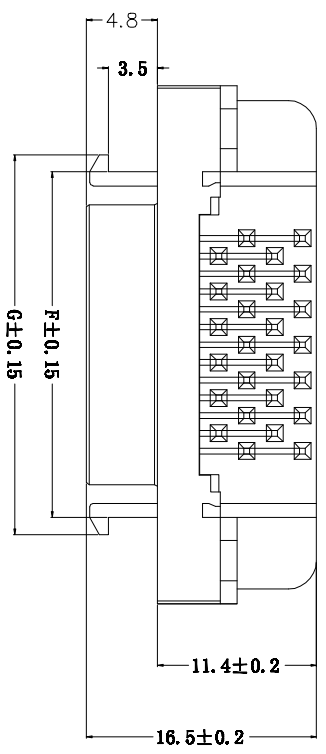

No. of pin	DUNE INSTONS						
	A	B	C	D	E	F	G
14	7.62	9.52	12.6	29.51	23.64	17.25	19.58
20	11.43	13.1	16.43	33.32	27.45	21.06	23.39
26	15.24	17.1	20.24	37.13	31.26	24.76	27.2
36	21.59	23.4	26.5	43.48	37.61	31.11	33.55
50	30.48	32.29	35.39	52.37	46.5	42.44	

**SPECIFICATION**  
Housing: Thermoplastic, UL94V-0  
Color: Black  
Contact: Copper Alloy  
Shell: Zinc Alloy  
Voltage Current Rating: 0.5AMP, 250V AC  
Insulation Resistance: 500M Min  
Contact Resistance: 80m Max  
Dielectric Withstanding Voltage: 500V AC  
Temperature Range: -25°C~+70°C

2	CONTACT	
1	HOUSING	
ITEM	PART NAME	

GENERAL TOLERANCE		ANGLE TOLERANCE	
X	±0.60	X	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE		SHEET	
DRAWING NO.		1 OF 1	

PROJECTION UNITS: mm

SHEET SIZE: A4

SERIES: LL1026-2 Female Right Angle

TITLE: SCS1 Socket Connector

ED

SCALE: 1:1

DRAWING NO. 4

5

6

7

8

慈溪蓝翎电子有限公司  
CIXI LANLING ELECTRONICS CO., LTD.