

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014		
B	AMD P/N CODE	CJJ 11/18/2014		


NOTES:

- SPECIFICATION:
  - CONTACT RESISTANCE: 30mΩ MAX.
  - DIELECTRIC WITHSTANDING VOLTAGE: 250V AC(rms) FOR 1 MINUTE.
  - INSULATION RESISTANCE: 500MΩ Min.
  - OPERATING TEMPERATURE: -40°C~+105°C.

2. PRODUCT NUMBER CODE:

LL1044-1A-X X X X X

- PROFILE HEIGHT(DIM. A):  
0:6.0mm  
1:6.47mm
- CONTACT PLATING:  
F1: FULL GOLD FLASH  
N: NICKEL
- 2: GOLD+NICKEL
- HOUSING COLOR:  
B: BLACK U:BLUE Y:YELLOW  
W: WHITE E:GREEN R:RED
- HOUSING TYPE:  
A:OPEN B:CLOSE L:Llong  
No. OF CONTACTS:  
2: 2pin

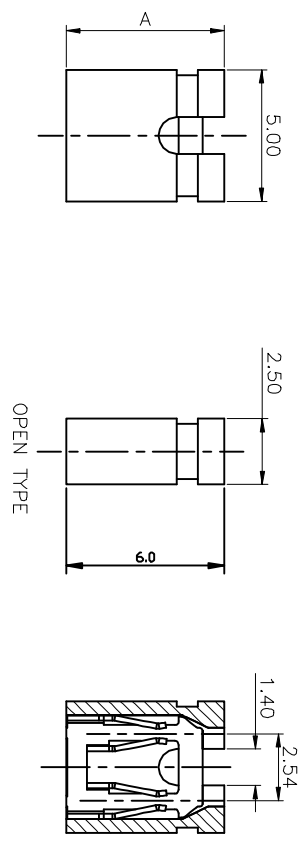

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	TITLE
X, ±0.60	X, ±5°	mm	2.54mm MINI JUMPER OPEN TYPE
.X, ±0.38	X, ±3°	A4	LL1044-1A
.XX, ±0.25	.XX, ±2°		
DRAWING TYPE: CUSTOMER			
SCALE: 1:1	SHEET: 1 OF 1		
DRAWING NO.: C-DS1027-XXXXX			

**慈溪蓝翎电子有限公司**  
**CITI LANLING ELECTRONICS CO., LTD.**  
 Tel: 86-574-89519096 Fax: 86-574-89517070