

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014		
B	ADD P/N CODE	CJJ 11/18/2014		

NOTES:

- SPECIFICATION:
 - CONTACT RESISTANCE: 30mΩ MAX.
 - DIELECTRIC WITHSTANDING VOLTAGE: 250V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 500MΩ Min.
 - OPERATING TEMPERATURE: -40°C~+105°C.
- PRODUCT NUMBER CODE:

LL1044-1C - X X X X X

PROFILE HEIGHT(DIM A): 0.6.0mm

CONTACT PLATING: F1: FULL GOLD FLASH

N: NICKEL

2: GOLD+NICKEL

HOUSING COLOR: B: BLACK U:BLUE Y:YELLOW

W: WHITE E:GREEN R:RED

HOUSING TYPE: A:OPEN B:CLOSE

No.OF PORTS:


3: 3ports 8: 8ports

4: 4ports 9: 9ports


5: 5ports 10: 10ports

6: 6ports


7: 7ports

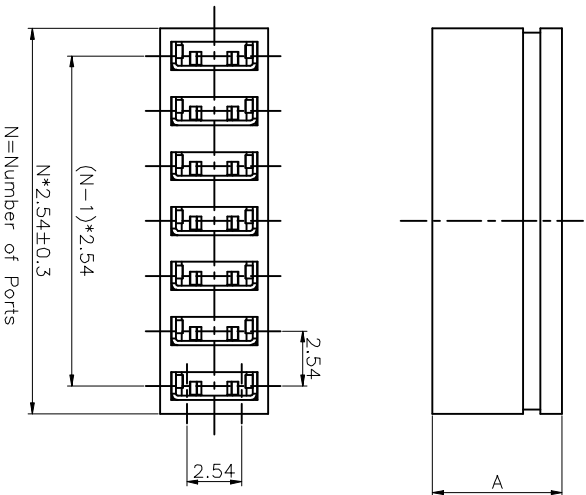


N=Number of Ports



OPEN TYPE



CLOSE TYPE

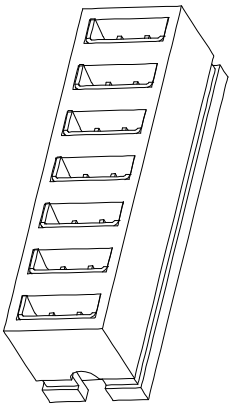

GENERAL TOLERANCE	ANGLE TOLERANCE
X: ±0.60	X: ±5°
.X: ±0.38	X: ±3°
.XX: ±0.25	.XX: ±2°

DRAWING TYPE	CUSTOMER	SCALE	SHEET	1 OF 1
C-DST1027-02-XXXXX	1:1	1:1		

PROJECTION	TITLE
UNITS: mm	2.54mm MINI JUMPER CONTINUUM
SHEET SIZE: A4	SERIES: LL1044-1C

慈溪蓝翎电子有限公司
 CIXI LANLING ELECTRONICS CO., LTD.
 慈 溪 电 子
 Tel: 86-574-63519295 Fax: 86-574-63517070