

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014		
B	ADD P/N CODE	CJJ 11/18/2014		

NOTES:

- SPECIFICATION:
  - CONTACT RESISTANCE: 30mΩ MAX.
  - DIELECTRIC WITHSTANDING VOLTAGE: 250V AC(ms) FOR 1 MINUTE.
  - INSULATION RESISTANCE: 500MΩ MINI.
  - OPERATING TEMPERATURE: -40°C~+105°C.
- PRODUCT NUMBER CODE:

LL1044-2A- X X X X X

PROFILE HEIGHT(DIM A):

- 1: 3.50mm
- 2: 5.00mm

CONTACT PLATING:

- F1: FULL GOLD FLASH
- N: NICKEL
- 2: GOLD+NICKEL

HOUSING COLOR:


- B: BLACK U:BLUE Y:YELLOW
- W: WHITE E:GREEN R:RED

HOUSING TYPE:

- A:OPEN B:CLOSE

No.OF CONTACTS:

- 2: 2pin

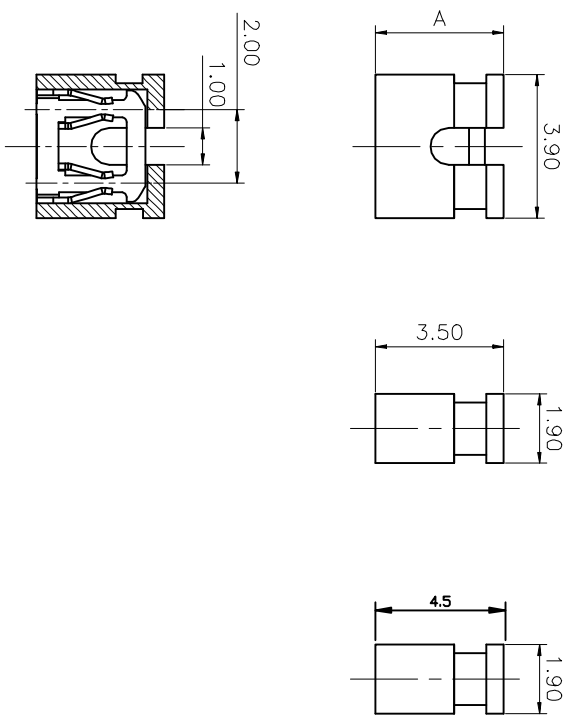

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	TITLE
X: ±0.60	X: ±5°	UNITS	2.0mm MINI JUMPER OPEN TYPE
.X: ±0.38	.X: ±3°	SHEET SIZE	
.XX: ±0.25	.XX: ±2°	A4	
DRAWING TYPE CUSTOMER SHEET		SERIES LL1044-2A	
SCALE 1:1		SHEET 1 OF 1	
DRAWING NO. C-DS1028-XXXXX			

慈溪蓝翎电子有限公司  
 CIXI LANLING ELECTRONICS CO., LTD.  
 慈溪 86-574-83618006 杭州 86-574-83617070