

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014		
B	ADD P/N CURS	CJJ 11/18/2014		

NOTES:

1. SPECIFICATION:

- 1.1 CONTACT RESISTANCE: 30mΩ MAX.
- 1.2 DIELECTRIC WITHSTANDING VOLTAGE: 250V AC(rms) FOR 1 MINUTE.
- 1.3 INSULATION RESISTANCE: 500MΩ MIN.
- 1.4 OPERATING TEMPERATURE: -40°C~+105°C.

2. PRODUCT NUMBER CODE:

LL1044-2B- X X X X X X

PROFILE HEIGHT(DIM A):

- 1: 3.50mm
- 2: 5.00mm

CONTACT PLATING:

F1: FULL GOLD FLASH

N: NICKEL

Z: GOLD+NICKEL

HOUSING COLOR:

B: BLACK U:BLUE Y:YELLOW


W: WHITE E:GREEN R:RED

HOUSING TYPE:

A:OPEN B:CLOSE

No.OF CONTACTS:

2: 2pin

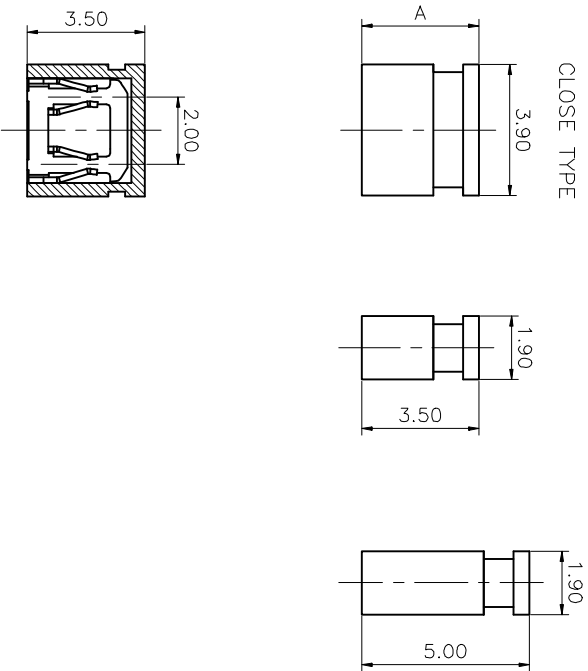

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	TITLE
X. ±0.60	X. ±5°	mm	2.0mm MINI JUMPER CLOSE TYPE
.X ±0.38	.X ±3°	A4	LL1044-2B
.XX ±0.25	.XX ±2°	SHEET	SERIES
DRAWING TYPE	CUSTOMER	SCALE	
DRAWING NO.	C-DS1028-XXXXX	1:1	
		SHEET	
		1 OF 1	

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.
 Tel: 86-574-63619098 Fax: 86-574-63617070