



REV	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2015	~	ZQJ 11/18/2015
B	ADD P/N CODE	CJJ 11/18/2015	~	CJJ 11/18/2015

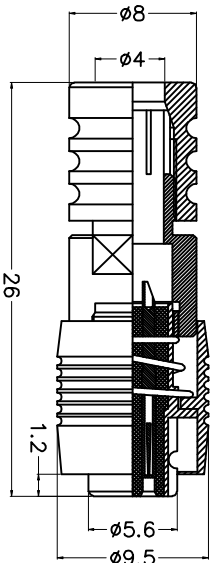

直式母插头 (镀锡-镀黑-镀金)
straight female plug
(Chrome plated-black chrome plated-gold plated) **XS6**

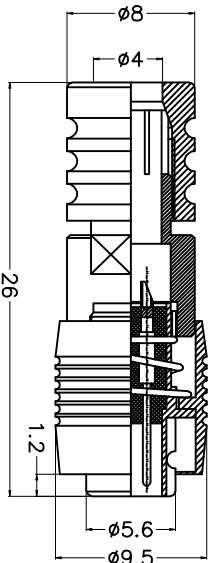

直式公插头 (镀锡-镀黑-镀金)
straight male plug
(Chrome plated-black chrome plated-gold plated)


数量	数量 of contacts	2	3	4	5
插针规格	插针规格 Insert specification	6+0	6+0 3s	6+0 3s	6+0 3s
插针公差	插针公差 Insert tolerance	0.6	0.6	0.6	0.6
插针长度	插针长度 Insert length	2.5	2.5	2.5	2.5
插针间距	插针间距 Insert pitch	110	110	110	110
插针间距公差	插针间距公差 Insert pitch tolerance	1000	1000	1000	1000
插针间距公差	插针间距公差 Insert pitch tolerance	25	25	25	25
插针间距公差	插针间距公差 Insert pitch tolerance	1500	1500	1500	1500
插针间距公差	插针间距公差 Insert pitch tolerance	0.6	0.6	0.6	0.6

GENERAL TOLERANCE	ANGLE TOLERANCE
X ±0.60	X ±5°
.X ±0.38	.X ±3°
.XX ±0.25	.XX ±2°

PROJECTION	TITLE
UNITS mm	XS6 直式公插头 直式母插头
SHEET SIZE A4	SERIES XS6 Straight Male+Female Plug

ITEM	PART NAME
1	HOUSING
2	CONTACT

DRAWING TYPE	CUSTOMER
SCALE 1:1	SHEET 1 OF 1
DRAWING NO.	


慈溪蓝翎电子有限公司
 CIXI LANLING ELECTRONICS CO., LTD.