
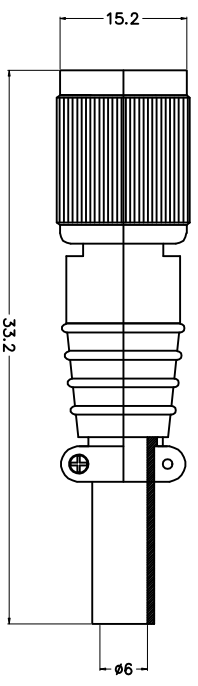


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2015	~	ZQJ 11/18/2015
B	ADD P/N CODE	CJJ 11/18/2015	~	CJJ 11/18/2015

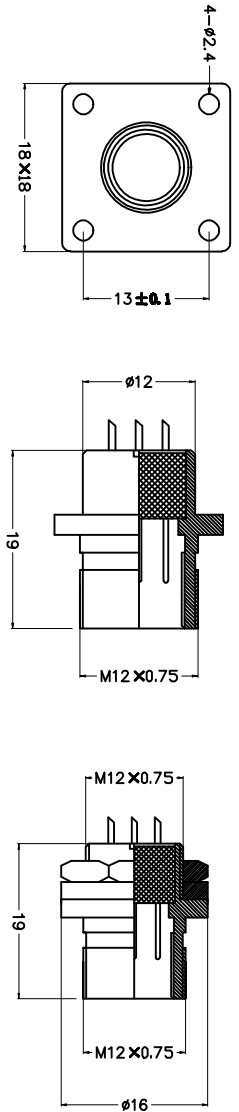

材料 Shell case	Y12-2	Y12-3	Y12-4	Y12-5	Y12-6	Y12-7
Material, dimensions and other details are given including the shell case details	3A	3A	3A	3A	3A	3A
额定电压 Rated voltage	AC250V/50Hz	AC250V/50Hz	AC250V/50Hz	AC250V/50Hz	AC250V/50Hz	AC250V/50Hz
额定功率 Rated power	1.5W	1.5W	1.5W	1.5W	1.5W	1.5W
额定电流 Rated current	60mA	60mA	60mA	60mA	60mA	60mA
额定寿命 Rated life	10000h	10000h	10000h	10000h	10000h	10000h

GENERAL TOLERANCE	ANGLE TOLERANCE
X: ±0.60	X: ±5°
.X: ±0.38	.X: ±3°
.XX: ±0.25	.XX: ±2°

2	CONTACT		DRAWING TYPE	CUSTOMER
1	HOUSING		SCALE	1:1
ITEM	PART NAME		DRAWING NO.	

PROJECTION	TITLE
UNITS: mm	X12 Micro Jack Connector
SHEET SIZE: A4	SERIES: X12

X12 系列(方.圓.螺口式) 2T-7T

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.