
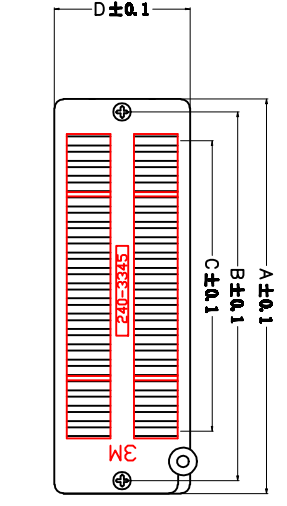


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B		CJJ 11/18/2014	~	ZQJ 11/18/2014
C		CJJ 11/18/2014	~	

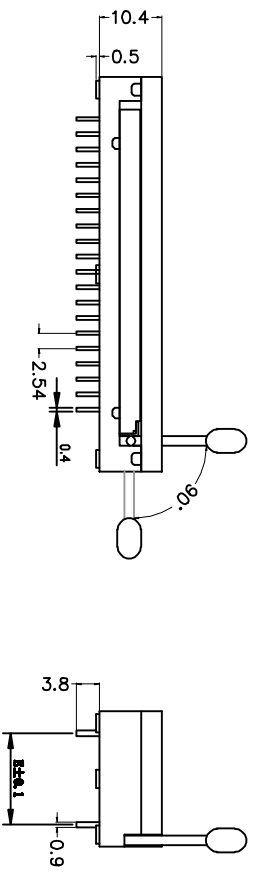

Position	A	B	C	D	E
14P	33.2	29.2	15.24	14.9	7.62
16P	35.2	31.2	17.78	14.9	7.62
20P	40.8	36.8	22.86	14.9	7.62
24P	45.2	41.2	27.94	22.6	15.24
28P	50.3	46.3	33.02	22.6	15.24
32P	55.3	51.3	38.1	22.6	15.24
40P	65.3	61.3	48.26	22.6	15.24
48P	75.7	71.7	58.42	22.6	15.24

Material:  
Housing: 30% Glass filled PBT UL94-0  
Contacts: Phosphor Bronze  
Plating: Gold plated 3u" over 50u" nickel  
Tin plated: 100u over 50u" nickel  
Electrical Characteristics:  
Current Rating: 1 AMP.  
Insulator Resistance: 500MΩ min/at DC 500V  
Contact Resistance: 20mΩ max/at DC 100mA  
Operating Temperature: -55°—+105°  
Features:  
For DIPs with 100° lead spacing  
Lever actuated zero insertion force mechanism  
Socket easily disassembles for reparability.  
Socket contact point of 110 below top surface of socket.

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	TITLE
X, ±0.60	X, ±5°	mm	2.54MM ZIF SOCKET MATRD
.X, ±0.36	.X, ±3°	A4	BY 7.62/16.24MM PITCH
.XX, ±0.25	.XX, ±2°		LL1002-1A

DRAWING TYPE	CUSTOMER	SHEET	1 OF 1
SCALE	1:1		
DRAWING NO.			

**慈溪蓝翎电子有限公司**  
**CIXI LANLING ELECTRONICS CO., LTD.**  
Tel: 86-574-83618038 Fax: 86-574-83618070