REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B		CJJ 11/18/2014	~	ZQJ 11/18/2014
C		CJJ 11/18/2014	~	

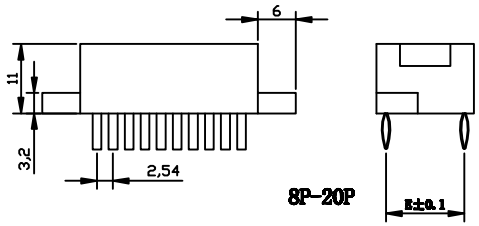

8P-20P



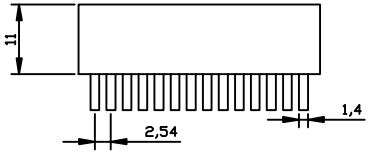



24P-40P

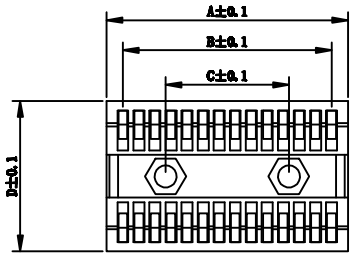

Position	A	B	C	D	E
8P	19.3	13.3	7.62	15.4	11
14P	27.2	21.2	15.24	15.4	11
16P	28.7	22.7	17.78	15.4	11
18P	32.1	26.1	20.32	15.4	11
20P	34.1	28.1	22.86	15.4	11
24P	33	27.94	15.5	23.8	19
28P	38.3	33.02	19.5	23.8	19
40P	53	48.26	31.2	23.8	19

Material:
- Housing: 30% Glass filled PBT UL94-0.
- Contacts: Phosphor Bronze.
- Plating: Gold plated: 3u " over 50u " nickl.
  - Tin plated: 100u "over 50u " nickl.

Electrical Characteristics:
- Current Rating: 1 AMP.
- Insulator Resistance: 500MΩ min,at DC 500V
- Contact Resistance: 20mΩ max,at DC 100mA
- Operating Temperature:-55° C——+105° C.

Features:
- For DIPs with.100" lead spacing
- Lever actuated zero insertion force mechanism
- Socket easily disassembles for repairability.
- Socket contact plant of.110 "below top surface of socket.

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.			

PROJECTION		TITLE	2.54MM ZIF SOCKET ROUND PIN
UNITS	mm		
SHEET SIZE	A4	SERIES	LL1002-2

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.
Tel: 86-574-63519036 Fax: 86-574-63517070